



# BRPW2S

## Double Wide Retarder/Proofer

### STANDARD FEATURES

- Low profile, 94" overall height
- Patented air flow system
- Easy access heat and humidity system
  - Internally mounted
  - No flushing required
- Eye-level digital control panel
  - Set heat/humidity system
  - Four independent timers
- Programmable 24-hour timer for one or seven day cycle
- Stainless steel interior and exterior
- Configured for remote R22 refrigeration
- Field assembled – shipped knocked down
- Open floor – no ramp required

### OPTIONS & ACCESSORIES

- Pass-Thru
- Stainless steel floor - no ramp required
- Self-contained refrigeration – 40.5"D & 60.5"D only
- Windows in doors
- Configured for remote R134A or R404 refrigeration
- Interior light
- Prison package
- Upper side trim – 1 or 2 sides

### MODEL CONFIGURATIONS

- 40.5"D** – May be shipped assembled
  - Three Single End or Four Side Load Racks or Two Double Racks
- 60.5"D**
  - Six Single End or Side Load Racks or Two Double Rack
- 80.5"D**
  - Eight Single End or Side Load Racks or Four Double Racks
- 100.5"D**
  - Nine Single End or Ten Side Load Racks or Four Double Racks
- 120.5"D**
  - Twelve Single End or Side Load Racks or Six Double Racks



CITY OF  
LOS ANGELES  
M-900182

Area Reserved For Consultant & Contractor Approvals



19220 State Route 162 East  
Orting, WA 98360  
www.baxterbakery.com




**Factory**  
(360) 893-5554

**Customer Care**  
(800) 777-2828  
or  
(800) 462-2778

**Customer Care Fax**  
(937) 332-2852



# BRPW2S Double Wide Retarder/Proofer

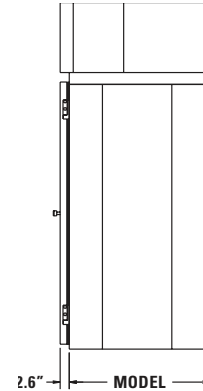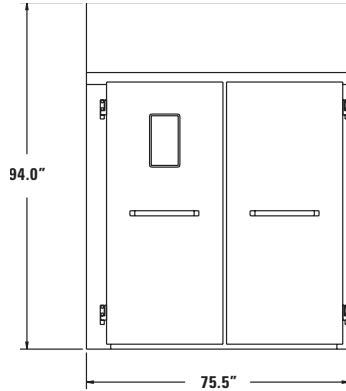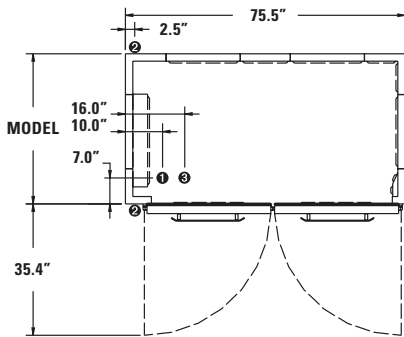

- 74" max. Rack Height.
- Freight Class: 85

Physical Data	Model 40.5"D	Model 60.5"D	Model 80.5"D	Model 100.5" D	Model 120.5"D
<b>Interior Dimensions</b>	37.8"D x 66.0"W 95.9cm x 167.6cm	57.8"D x 66.0"W 146.7cm x 167.6cm	77.8"D x 66.0"W 197.5cm x 167.6cm	97.8"D x 66.0"W 248.3cm x 167.6cm	117.8"D x 66.0"W 299.1cm x 167.6cm
<b>Exterior Dimensions</b>	43.4"D x 75.5"W x 94.0"H 109.9cm x 191.8cm x 238.8cm	63.3"D x 75.5"W x 94.0"H 160.7cm x 191.8cm x 238.8cm	83.3"D x 75.5"W x 94.0"H 211.5cm x 191.8cm x 238.8cm	103.3"D x 75.5"W x 94.0"H 262.4cm x 191.8cm x 238.8cm	123.3"D x 75.5"W x 94.0"H 313.1cm x 191.8cm x 238.8cm
<b>Net Door Opening Height</b>	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm
<b>Net Door Opening Width</b>	64.5" / 163.8cm	64.5" / 163.8cm	64.5" / 163.8cm	64.5" / 163.8cm	64.5" / 163.8cm
<b>Power Input with Neutral <sup>Ⓐ</sup></b>	208-240V/1/18.4-20.4A or 208-240V/3/18.4-20.4A	208-240V/1/37.0-42.0A or 208-240V/3/32.0-37.0A	208-240V/1/37.0-42.0A or 208-240V/3/32.0-37.0A	208-240V/1/37.0-42.0A or 208-240V/3/32.0-37.0A	208-240V/3/35.5-39.5A
<b>Remote Refrigeration (std) <sup>Ⓑ</sup></b>	1 evaporator supplied 6,000 BTU/hr min. remote compressor required	1 evaporator supplied 6,000 BTU/hr min. remote compressor required	2 evaporators supplied 12,000 BTU/hr min. remote compressor required	2 evaporators supplied 12,000 BTU/hr min. remote compressor required	2 evaporators supplied 12,000 BTU/hr min. remote compressor required
<b>Refrigeration Supplied (Optional)</b>	6,000 BTU Condenser	6,000 BTU Condenser	N/A	N/A	N/A
<b>KD Shipping Info</b> (crate dims. & approx. wgt.)	91.5"D x 36.5"W x 65.5"H 1,310 lbs. <sup>Ⓒ</sup>	91.5"D x 36.5"W x 65.5"H 1,700 lbs.	91.5"D x 36.5"W x 65.5"H 1,900 lbs.	127.5"D x 44.5"W x 65.5"H 2,050 lbs.	127.5"D x 44.5"W x 65.5"H 2,250 lbs.

## UTILITIES & NOTES

- 1 Water:** 1/2" FNPT cold water 30-80 psi at 85" AFF (215.9 cm).  
**NOTE:** Water supply must have the proper hardness, pH & chloride concentration. Consult your local water company and/or water conditioner dealer before installation.
    - **Recommended water hardness range:** 2-4 grains per gallon.
    - **Recommended pH range:** 7.0 to 8.0.
    - **Acceptable range for chloride concentration:** 0-30 ppm.
  - 2 Drain:** 1/2" FNPT, front or rear drain at 5" AFF (12.7 cm). Rte to air-gap drain.
  - 3 Power:** Provide connection(s) at 85" AFF (215.9 cm). See chart above.
    - <sup>Ⓐ</sup> Neutral wire circuitry needed to provide 110-120V for control components. A separate line may be run or a transformer will be required if 110-120V is not available.
  - Ⓑ Refrigeration:** Requirements shown are based on a minimum of 2 hours to attain retarding temps from proofing temps. Consult factory for additional refrigeration requirements if faster times are needed.
- Installation:** Floor should be level within 1/8" per foot for proper installation. Slope should not exceed 3/4" in all directions under the unit.
- Ⓒ Shipping:** Contact factory for shipping information.

## SHORT SPECIFICATION

The retarder/proofer shall be of stainless steel construction, manufactured in the United States by Baxter Mfg. The unit footprint shall be no wider than 75.5" and have an overall height of 94.0". Built using modular panel construction with cam lock attachment, the retarder/proofer shall incorporate foam insulation and gaskets to form a strong, energy efficient enclosure. Nonmetallic interior bumpers shall protect the interior on all sides.

The retarder/proofer shall include eye level, digital controls in one door, and a patented air flow system. No ramp is required for this unit. The controls will independently set temperature and humidity for precise proofing and retarding control. Four individual count-down timers for products with different time requirements shall be provided. The air flow system will include an internally mounted humidifier. No flush cleaning is required. The unit will typically be configured to utilize a remote refrigeration system using R22, R134A or R404 refrigerant. Refrigerant type must be specified at time of order. Required evaporator (s) will be supplied with the retarder/proofer. The doors shall be hinged so as to not require a center jamb; giving maximum access to the retarder/proofer interior.

The retarder/proofer will bear the following agency approvals: UL for safety and sanitation and city of Los Angeles..

Manufacturer reserves the right to make changes in sizes and specifications.



19220 State Route 162 East  
Orting, WA 98360  
www.baxterbakery.com

**Factory**  
(360) 893-5554

**Customer Care**  
(800) 777-2828  
or  
(800) 462-2778

**Customer Care Fax**  
(937) 332-2852