

<b>Type:</b>	<b>Issue Date:</b>	<b>Project:</b>
<b>Part #: 1G4014</b>		

**TCP** Globe Lamps G25, G30, **G40** Series Specifications

**SpringLamp® Compact Fluorescent, NPF** 8,000 Hours average rated life

**Applications:**

- Use anywhere a standard incandescent is used.

**Replaces Incandescent for:**


- Vanity Strips
- Table Lamps
- Closet Lights
- Ceiling Fixtures
- Sconces

**Special Application Options: (Ordering Suffix)**


- 3100K (31K)
- 4100K (41K)
- 6500K (65K)
- 3500K (35K)
- 5500K (55K)

**Features and Benefits**

- Long life CFL, 8,000 hour average rated life
- Amalgam Technology- provides cooler operating temperatures for consistent performance in any position
- No lead glass- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base or candelabra base available
- Replace less often, ideal for hard to reach places
- Quick run-up time
- Medium base and compact height fits anywhere a standard incandescent fits
- Instant start, flicker free
- End of Life logic guards against violent failures
- Quickstart technology - fast run up time

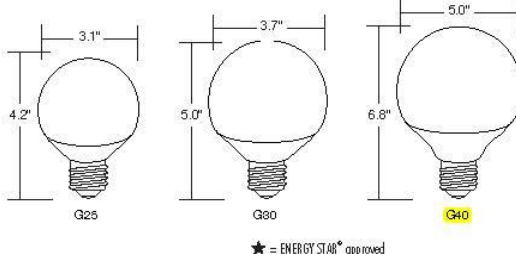

★ = ENERGY STAR® approved

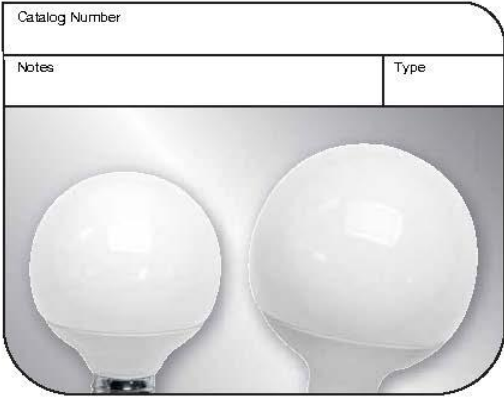

**Specifications ( at full brightness )**

End of Life Protection.....	Yes
Ballast Type .....	Electronic
Starting Method.....	Modified Rapid Start
Input Line Voltage .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (rated) .....	8,000 Hours
Color Temperature .....	2700°K
Color Rendering Index .....	82
Minimum Starting Temperature .....	-20°F, -29°C
Maximum Operating Temperature .....	160°F, 71°C
U.L. / C.U.L. Listed .....	Yes - E149698
FCC Compliance.....	Part 18, Subpart C
Lamp Operating Frequency .....	45 KHZ
Max. Open Circuit Voltage .....	600V
Lamp Current Crest Factor .....	<1.60
Total Harmonic Distortion .....	<150%
High Power Factor Rated .....	>.50

**Special Notes**

- UL approved for wet location in Base Up position only. Base Up position is defined as screw base in a 12:00 position. Any other base position must be in a UL approved weatherproof fixture.

Warranties and Certifications:	Item#	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (Inches)	Diameter (Inches)	Base Type
  TCP reserves the right to void the warranty for any mis-application of these products.	1G2504	4	25	250	.07A	4.2	3.1	E26
	1G2509	9	40	495	.15A	4.2	3.1	E26
	1G2509C	9	40	495	.15A	4.2	3.1	E12
	★ 2G2514	14	60	800	.23A	4.7	3.1	E26
	1G3009	9	40	495	.15A	5.0	3.7	E26
	★ 1G3014	14	60	800	.23A	5.0	3.6	E26
	★ 1G3019	19	75	950	.30A	4.9	3.7	E26
	1G3023	23	100	1400	.38A	5.9	3.6	E26
	1G4014	14	60	800	.23A	6.8	5.0	E26
	1G4019	19	75	950	.30A	6.8	5.0	E26
1G4023	23	100	1300	.38A	6.8	5.2	E26	

TCP, Inc.  
 325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | kpi.com  
 © TCP, Inc. OCT 2009/41640

TCP is proud to have been awarded ENERGY STAR® Partner of the Year 2009.

