randell

Reach-In Double Glass Door Freezer models 2021F

Description:
Randell Series 2000 Reach-Inare built for years of efficient, high performance service. The top mounted, expansion valve refrigeration system offers the highest, most consistent performance available while maximizing usable interior space.

Specifications:

CABINET EXTERIOR: Cabinet body is constructed of all metal, inside & out. The top, bottom, & back are galvanized steel. Front and sides are available in finishes as listed above. Doors and louver are removable without tools. Unit on 6" casters, front two are locking.

CABINET INTERIOR: Interior of cabinet is fully coved to meet N.S.F. standard #7. The interior walls, ceiling and door liner are available in either stainless steel or anodized aluminum as listed above. Foamed in place, CFC free urethane insulation. Snap-in A.B.S. breaker strips allow access to condensate heater wires.

DOORS: Glass front with either anodized aluminum or stainless steel liner, mounted on heavy duty cam lift hinges with automatic light switch, heavy duty chrome handle, cylinder door lock.

REFRIGERATION: Top mounted condensing unit and evaporator coil, expansion valve system with pressure control, factory tested and balanced to maintain (0˚ F. to -5˚ F.) average interior temperature utilizing CFC free 404a refrigerant. Evaporator coil is coated to resist corrosion. Unit supplied with master on/off switch and 8' cord and plug. Access to service points without tools is standard. Provided with full automatic coil defrost with programmable timer and safety switches.

Finishes:

☐ **Standard Series** Louver: Stainless steel.
Exterior Sides: Anodized aluminum. Interior: Anodized aluminum

☐ **E Series (Add Suffix "E")** Cabinet interior, exterior sides and fronts stainless steel.

Standard Features:
- Expansion Valve
- Digital Control
- Exterior LED Temperature Display
- Top mounted Compressor & Evaporator Coil

model 2021F shown

Standard Features Continued:
- C.F.C. Free R-404a Refrigerant
- Efficient Hot Gas Condensate Evaporator
- Full Automatic Coil Defrost With Programable Timer and Safety Switches
- 8' Cord & Plug
- Main Power Supply Switch
- Self-Closing Cam Lift Hinges with 120˚ Open Feature (Lifetime Warranty)
- Automatic Interior Light on door
- 6" Casters - Factory Mounted (Front two Locking)
- Cylinder Door Locks
- Fully Coved Interior Meeting N.S.F. Standard #7
- Polyurethane Insulation
- Condensate Heaters Around All Door Openings
- 3 Baked Epoxy Coated Wire Shelves Per Section With Stainless Steel Support Clips (Adjustable every 1")
- Snap-In Magnetic Door Gaskets

Options & Accessories:

☐ Universal Tray Slides (set of two) Qty. _____ Sets _____
☐ 1/2 Doors Qty. ____ Location _____
☐ 6" Legs
☐ Extra Interior Shelves Qty. _____
(maximum of (23) or (20) additional on 1.5" centers-leaves 1" clear)
☐ Finished Back
☐ Export Voltage(s) Specify Voltage _____
☐ Prison Package

Refrigeration Type (Add Suffix "R"):

☐ Remote

0°F to -5°F
some models available for -10°F applications, consult factory

1055 Mendell Davis Drive, Jackson, MS 39272
888-994-7636, unifiedbrands.net
Please reference our website for the most updated product information and specifications.

randell

Models 2021F

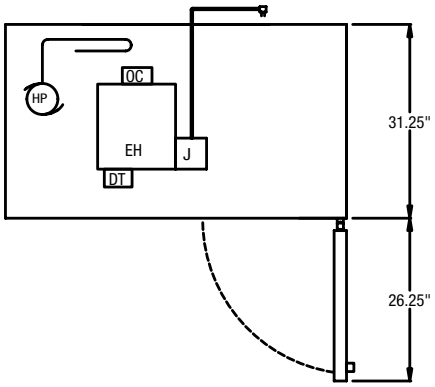

LEGEND FOR
MODEL # 2021F

4180 BTU/Hr

HP — 3/4hp COMPRESSOR
R404A REFRIGERANT

J — JUNCTION BOX
115V/60Hz/1Ph
15.4 Amps

9' LONG CORD SET
(NEMA 5-20P)

EH EVAPORATOR HOUSING
DT DEFROST TIMER
OC CONDENSATE DRAIN 1/2"

HOT GAS
CONDENSATE
EVAPORATOR

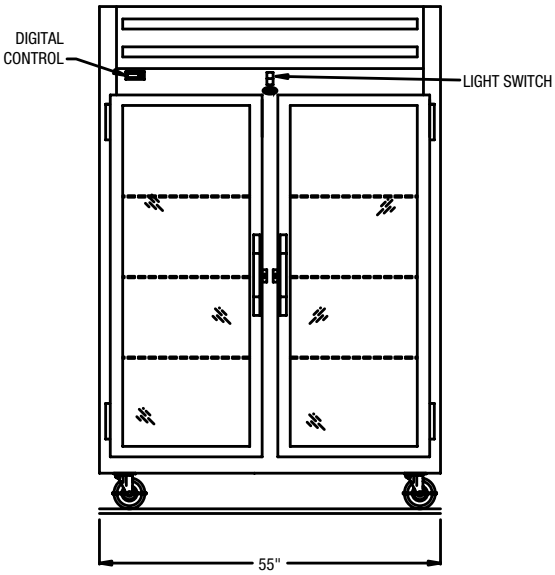

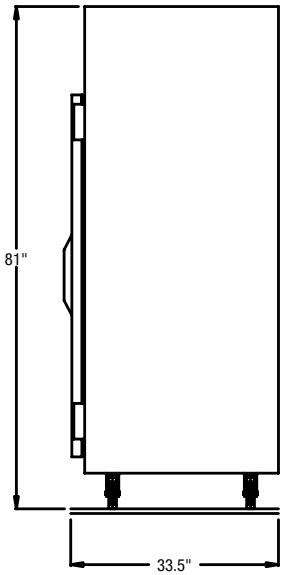

TRAYSLIDE CAPACITIES

Universal Pan Slides .... Model....RIUNIVPS - set of two.
For 12 x 20 food pans or 18 x 26 sheet pans.

Maximum capacity of 12" x 20" food pans per full height section:
(6) 6" deep pans, (8) 4" deep pans, (18) 2" deep pans.

Maximum capacity of 18" x 26" sheet pans with 2" spacing is (22).

FOR REMOTE MODELS
Use same specifications as self-contained models except for:

Model No.	Rec. H.P.	Rec. BTU/Hr.	Amp.	Ship Wt.
2021FR solid door	3/4	3520	9	570

Note: All remote Reach-Income standard on 6" legs in lieu of casters.

SELF-CONTAINED SINGLE SECTION FREEZERS

Model	L	D	H	Doors	Cu./Ft.	Shelves	Shelves Sq. Ft.	HP	Volt	Amps	NEMA	BTU Rating	Ship Wt.
2021F solid door	55”	33 1/2"	81.25”	2	46.08	6	26	2/3	115/60/1	15.4	5-20P	3520*	620

*Based on 90˚ ambient and -10˚ evaporator.

unified brands
A DOVER COMPANY

1055 Mendell Davis Drive, Jackson, MS 39272, 888-994-7636, unifiedbrands.net
© 2009 Unified Brands. All Rights Reserved. DOVER® and the DOVER® Logo are registered trademarks in the United States [and various other countries] of Unified Brands, a wholly-owned subsidiary of Dover Corporation.