


JOB:	
ITEM NO:	

ANGLE LEDGE UTILITY RACK MODEL 207-1820

FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on 18" x 26" pans and 14" x 18" trays.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Extruded angle ledge pan supports, welded in place, accommodate heavy loads. Bottom of pan or tray rests on angle ledges. See reverse side for capacity and pan spacing.
- Heavy duty 5" swivel casters, two with brakes.
 Provides mobility when fully loaded.

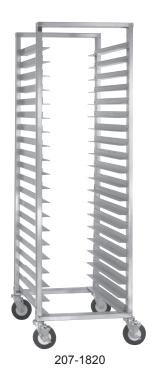




ACCESSORIES and OPTIONS (Available at extra cost):

- □ Pan Stop
- □ Corner Bumpers
- □ Vertical Bumpers
- □ Perimeter Bumper
- □ Various Caster Options

See page G-36 for accessory details.

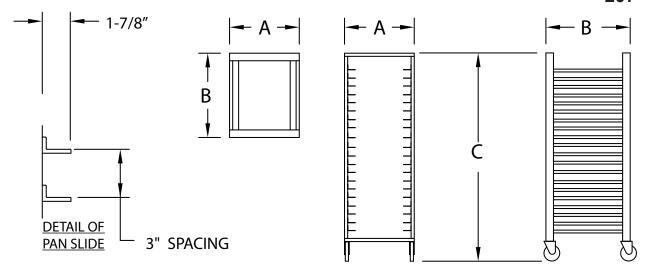

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		ACT.
207-1820	20	18 x 26	IN	22	29-5/8	69-3/4	18-3/8	28-7/8	61-1/2	LBS	75
	20	460 x 660	MM	560	755	1775	470	735	1565	KG	34

When ordering bumpers, add 2" to overall dimensions.

ALL CONSTRUCTION IS WELDED AND FINISHED.



Gold indicates our Best Rack with the best warranty in the industry. 3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -4°/+140°F.
 Sealed bearings. Two casters equipped with brakes.

PAN SLIDES:

 Extruded angles, 1-7/16 x 1-7/8 x .102; welded to posts on 3" centers.

SHORT FORM SPECIFICATIONS



5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

© Crescent Metal Products, Inc. 2017 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936