

JOB:	
ITEM NO:	

CORRECTIONAL EXTRUDED SIDEWALL UTILITY RACK MODEL 252-1839-Z

FEATURES AND BENEFITS:

- Durable heavy duty utility rack for transport and storage of products on 18" x 26" pans and plastic food boxes.
- Fully welded framework of structural aluminum extrusions. Additional extruded channels riveted and welded in place for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold pans on 1-1/2" centers. Sidewall panels are riveted and welded to posts.
- One piece aluminum base welded in place for extra strength.
- Inboard heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.
- Other heavy duty utility rack models available.




252-1839-Z



ACCESSORIES and OPTIONS (Available at extra cost):

- □ Pan Stop
- □ Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Various Caster Options

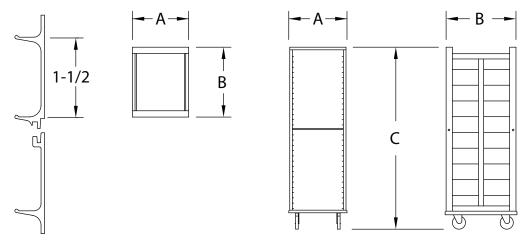

DETAIL OF PAN SLIDE

CRES COR MODEL NO.	PAN			DIM "A"	IM "A" DIM "B" DIM "C" INSIDE DIMENSIONS					WEIGHT	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	<u> </u>	ACT.
252-1839-Z	39	18 X 26	IN	21-15/16	26-5/8	69-11/16	18-1/8	25-1/2	61-1/2	LBS	70
	39	460 X 660	MM	560	680	1770	460	650	160	KG	32

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top bars: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie bars: Aluminum tubes welded to posts.
- · Sides: Interlocking extruded 6" panels, smooth outer sides. Reinforced horizontally and vertically with 1 x 2 x .125 extruded channel, riveted and welded in place.

BASE

- One piece construction, .190 aluminum.
- · Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp range -45/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

 Extruded interlocking side wall panels act as pan slides on 1-1/2" centers.