

Type:	Issue Date:	Project:
Part #: 32013/35K		

TCP



PL Lamp Specifications

Compact Fluorescent PL Lamp 10,000 Hours average rated life

Applications:

Perfect for most commercial applications: Use where a standard incandescent is used.

- Table Lamps
 - Recessed Downlighting
 - Outdoor Fixtures
 - Wall Scones
 - Ceiling Fixtures
 - Ceiling Fans
- NOT compatible with dimming applications

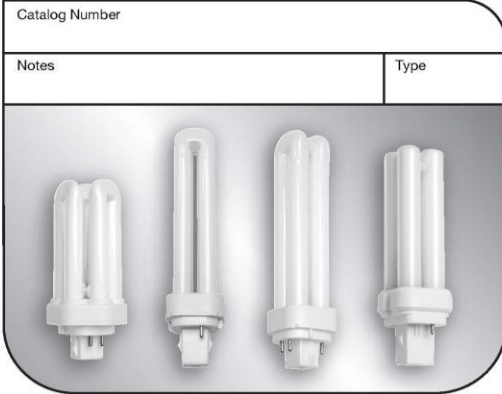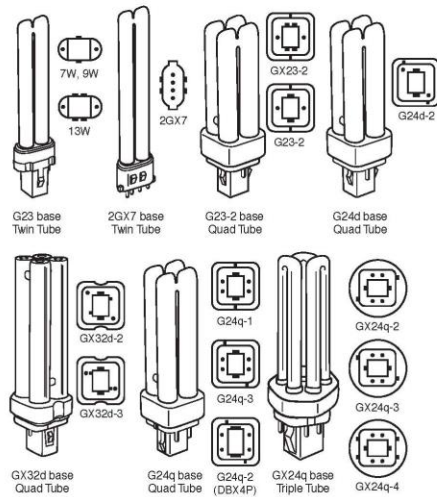

Special Application Options: (Ordering Suffix)


- 2700°K (27K), 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K)

Features and Benefits

- Long Life, 10,000 hour average rated life
- Lower maintenance and labor costs for lamp replacements
- Lasts 7 years, based on 3 hours use a day
- Bulb lasts 10-13 times longer than similar incandescent bulbs

Specifications (at full brightness)

Color Temperature 2700°K
Color Rendering Index 82

Warranties and Certifications:	Item #	Incandescent Wattage Comparison	Description	Base Type	Initial Lumens	M.O.L. (inches)	Diameter (inches)
 12 MONTH WARRANTY For the most up-to-date specs, please visit www.tcpinc.com	32005	5	Twin Tube, 2-pin	G23	240	3.20	1.20
	32007	7	Twin Tube, 2-pin	G23	380	5.30	1.22
	32009	9	Twin Tube, 2-pin	G23	580	6.50	1.01
	32013	13	Twin Tube, 2-pin	GX23	810	7.00	1.06
	32013IST	13	Twin Tube, 2-pin, Instant Start*	GX23	810	7.00	0.97
	324132GX7	13	Twin Tube, 4-pin	2GX7	810	6.375	1.26
	32009Q	9	Quad Tube, 2-pin	G23-2	600	4.15	1.34
	32013Q	13	Quad Tube, 2-pin	GX23-2	890	4.66	1.07
	32013ISQ	13	Quad Tube, 2-pin, Instant Start*	GX23-2	890	4.60	1.04
	32018Q	18	Quad Tube, 2-pin	G24d-2	1200	5.96	1.34
	32026Q	26	Quad Tube, 2-pin	G24d-3	1780	6.75	1.34
	32413Q	13	Quad Tube, 4-pin	G24q-1	890	5.08	1.03
	32418Q	18	Quad Tube, 4-pin	G24q-2	1200	5.60	1.02
	32426Q	26	Quad Tube, 4-pin	G24q-3	1780	6.25	1.04
	32020Q	20	Quad Tube, 2-pin	GX32d-2	1250	6.10	1.60
	32027Q	27	Quad Tube, 2-pin	GX32d-3	1600	6.30	1.80
	32413T	13	Triple Tube, 4-pin	GX24q-1	800	4.05	1.85
	32418T	18	Triple Tube, 4-pin	GX24q-2	1200	4.28	1.75
	32426T	26	Triple Tube, 4-pin	GX24q-3	1780	4.87	1.50
	32432T	32	Triple Tube, 4-pin	GX24q-3	2080	5.46	1.47
	32442T	42	Triple Tube, 4-pin	GX24q-4	2730	6.26	1.48

TCP, Inc.
325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcpinc.com
©TCP, Inc. JULY 2013/50577

Type:	Issue Date:	Project:
Part #: 32013/35K		

PL Lamp Specifications

Item #	Description	Initial Lumens	CCT	M.O.L. (inches)	Diameter (inches)	Item #	Description	Initial Lumens	CCT	M.O.L. (inches)	Diameter (inches)
32005	5W TWIN TUBE PL LAMP 2 PIN 27K	240	2700	3.20	1.20	324132G7	13W 4 PIN PL 2GX7 BASE	810	2700	6.375	1.26
3200535K	5W TWIN TUBE PL LAMP 2 PIN-35K	240	3500	3.20	1.20	324132G730K	13W 4 PIN PL 2GX7 BASE 30K	810	3000	6.375	1.26
3200541K	5W TWIN TUBE PL LAMP 2 PIN-41K	240	4100	3.20	1.20	324132G735K	13W 4 PIN PL 2GX7 BASE 35K	810	3500	6.375	1.26
3200550K	5W TWIN TUBE PL LAMP 2 PIN-50K	230	5000	3.20	1.20	324132G741K	13W 4 PIN PL 2GX7 BASE 41K	810	4100	6.375	1.26
						324132G750K	13W 4 PIN PL 2GX7 BASE 50K	760	5000	6.375	1.26
32007	7W TWIN TUBE PL LAMP 2PIN 27K	380	2700	5.30	1.22	32413Q	13W QUAD LAMP PL 4-PIN	890	2700	5.08	1.03
3200730K	7W TWIN TUBE PL LAMP 2PIN 30K	380	3000	5.30	1.22	32413Q30K	13W QUAD LAMP PL 4-PIN 30K	890	3000	5.08	1.03
3200735K	7W TWIN TUBE PL LAMP 2PIN 35K	380	3500	5.30	1.22	32413Q35K	13W QUAD LAMP PL 4-PIN 35K	890	3500	5.08	1.03
3200741K	7W TWIN TUBE PL LAMP 2PIN 41K	380	4100	5.30	1.22	32413Q41K	13W QUAD LAMP PL 4-PIN 41K	890	4100	5.08	1.03
3200750K	7W TWIN TUBE PL LAMP 2PIN 50K	350	5000	5.30	1.22	32413Q50K	13W QUAD LAMP PL 4-PIN 50K	840	5000	5.08	1.03
32009	9W TWIN TUBE PL LAMP 27K	580	2700	6.50	1.01	32413T	13W TRIPLE LAMP PL 4-PIN 27K	800	2700	4.05	1.85
3200935K	9W TWIN TUBE PL LAMP 35K	580	3500	6.50	1.01	32413T35K	13W TRIPLE LAMP PL 4-PIN 35K	800	3500	4.05	1.85
3200941K	9W TWIN TUBE PL LAMP 41K	580	4100	6.50	1.01	32413T41K	13W TRIPLE LAMP PL 4-PIN 41K	800	4100	4.05	1.85
3200950K	9W TWIN TUBE PL LAMP 50K	540	5000	6.50	1.01						
32009Q	9W QUAD PL LAMP 2-PIN 9DTT 27K	600	2700	4.15	1.34	32418Q	18W QUAD LAMP PL 4-PIN	1200	2700	5.60	1.02
32009Q41K	9W QUAD PL LAMP 2-PIN 41K	600	4100	4.15	1.34	32418Q30K	18W QUAD LAMP PL 4-PIN 30K	1200	3000	5.60	1.02
32013	13W TWIN TUBE PL LMP 2-PIN 27K	810	2700	7.00	1.06	32418Q35K	18W QUAD LAMP PL 4-PIN 35K	1200	3500	5.60	1.02
3201330K	13W TWIN TUBE PL LMP 2-PIN 30K	810	3000	7.00	1.06	32418Q41K	18W QUAD LAMP PL 4-PIN 41K	1200	4100	5.60	1.02
3201335K	13W TWIN TUBE PL LMP 2-PIN-35K	810	3500	7.00	1.06	32418Q50K	18W QUAD LAMP PL 4-PIN 50K	1140	5000	5.60	1.02
3201341K	13W TWIN TUBE 41K	810	4100	7.00	1.06	32418T	18W TRIPLE LAMP PL 4-PIN 27K	1200	2700	4.28	1.75
3201350K	13W TWIN TUBE PL LMP 2-PIN 50K	760	5000	7.00	1.06	32418T30K	18W TRIPLE LAMP PL 4-PIN 30K	1200	3000	4.28	1.75
3201365K	13W TWIN TUBE PL LMP 2-PIN 65K	760	6500	7.00	1.06	32418T35K	18W TRIPLE LAMP PL 4-PIN 35K	1200	3500	4.28	1.75
						32418T41K	18W TRIPLE LAMP PL 4-PIN 41K	1200	4100	4.28	1.75
32013ISQ	13W INSTANT START QUAD LAMP	890	2700	4.60	1.04	32426Q	26W QUAD LAMP PL 4-PIN	1780	2700	6.25	1.04
32013ISQ35K	13W INSTANT START QUAD LMP 35K	890	3500	4.60	1.04	32426Q30K	26W QUAD LAMP PL 4-PIN 30K	1780	3000	6.25	1.04
32013ISQ41K	13W INSTANT START QUAD LMP 41K	890	4100	4.60	1.04	32426Q35K	26W QUAD LAMP PL 4-PIN 35K	1780	3500	6.25	1.04
32013IST	13W TWIN TUBE INSTANT START 27K	810	2700	7.00	0.97	32426Q41K	26W QUAD LAMP PL 4-PIN 41K	1780	4100	6.25	1.04
32013IST35K	13W TWIN TUBE INSTANT START 35K	810	3500	7.00	0.97	32426Q50K	26W QUAD LAMP PL 4-PIN 50K	1680	5000	6.25	1.04
32013IST41K	13W TWIN TUBE INSTANT START 41K	810	4100	7.00	0.97						
32013Q	13W QUAD PL LAMP 2-PIN 130TT	890	2700	4.66	1.07	32426T	26W TRIPLE LAMP PL 4-PIN 27K	1780	2700	4.87	1.50
32013Q30K	13WQUAD PL LMP 2-PIN 130TT-30K	890	3000	4.66	1.07	32426T30K	26W TRIPLE LAMP PL 4-PIN 30K	1780	3000	4.87	1.50
32013Q35K	13WQUAD PL LMP 2-PIN 130TT-35K	890	3500	4.66	1.07	32426T35K	26W TRIPLE LAMP PL 4-PIN 35K	1780	3500	4.87	1.50
32013Q41K	13WQUAD PL LMP 2-PIN 41K	890	4100	4.66	1.07	32426T41K	26W TRIPLE LAMP PL 4-PIN 41K	1780	4100	4.87	1.50
32013Q50K	13WQUAD PL LMP 2-PIN 50K	840	5000	4.66	1.07	32426T50K	26W TRIPLE LAMP PL 4-PIN 50K	1680	5000	4.87	1.50
32018Q	18W QUAD PL LMP-2700K	1200	2700	5.96	1.34	32432T	32W TRIPLE LAMP PL 4-PIN 27K	2080	2700	5.46	1.47
32018Q30K	18W QUAD PL LMP 30K	1200	3000	5.96	1.34	32432T30K	32W TRIPLE LAMP PL 4-PIN 30K	2080	3000	5.46	1.47
32018Q35K	18W QUAD PL LMP-35K	1200	3500	5.96	1.34	32432T35K	32W TRIPLE LAMP PL 4-PIN 35K	2080	3500	5.46	1.47
32018Q41K	18W QUAD PL LMP-41K	1200	4100	5.96	1.34	32432T41K	32W TRIPLE LAMP PL 4-PIN 41K	2080	4100	5.46	1.47
32018Q50K	18W QUAD PL LMP-50K	1120	5000	5.96	1.34	32432T50K	32W TRIPLE LAMP PL 4-PIN 50K	1930	5000	5.46	1.47
						32432T65K	32W TRIPLE LAMP PL 4-PIN 65K	1930	6500	5.46	1.47
32020Q	20W QUAD PL LMP	1250	2700	6.10	1.60	32442T	42W TRIPLE LAMP PL 4-PIN 27K	2730	2700	6.26	1.48
32020Q50K	20W QUAD PL LMP-50K	1150	5000	6.10	1.60	32442T30K	42W TRIPLE LAMP PL 4-PIN 30K	2730	3000	6.26	1.48
32026Q	26W QUAD PL LMP-27K	1780	2700	6.75	1.34	32442T35K	42W TRIPLE LAMP PL 4-PIN 35K	2730	3500	6.26	1.48
32026Q30K	26W QUAD PL LMP-30K	1780	3000	6.75	1.34	32442T41K	42W TRIPLE LAMP PL 4-PIN 41K	2730	4100	6.26	1.48
32026Q35K	26W QUAD PL LMP-35K	1780	3500	6.75	1.34	32442T50K	42W TRIPLE LAMP PL 4-PIN 50K	2540	5000	6.26	1.48
32026Q41K	26W QUAD PL LMP-41K	1780	4100	6.75	1.34	32442T65K	42W 4PIN TRIPLE TUBE PL 65K	2540	6500	6.26	1.48
32026Q50K	26W QUAD PL LMP-50K	1680	5000	6.75	1.34						
32027Q	20W 2PIN QUAD PL GX32D-3	1600	2700	6.30	1.80						
32027Q41K	20W 2PIN QUAD PL GX32D-3 41K	1600	4100	6.30	1.80						
32027Q50K	20W 2PIN QUAD PL GX32D-3 50K	1600	5000	6.30	1.80						

For the most up-to-date specs, please visit www.tcpi.com

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcpi.com

©TCP, Inc. JULY 2013/50577

12 MONTH
WARRANTY

