

## BANQUET RING DOLLY MODEL 501-10-480-B

### FEATURES AND BENEFITS:

- Holds standard plate covers and banquet rings for storage and transport.
- Protective plastic coating at points of contact.
- Base constructed of one piece, non-corrosive, Hi-Tensile aluminum with cross brace reinforcement for added strength.
- Special wide track caster placement assures stability.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded. No rust sealed bearings prevent "wheel lock" in wet environments.



501-10-480-B




**SANITATION  
NSF/ANSI 4**

### ACCESSORIES and OPTIONS (Available at extra cost):

- Vinyl Dust Cover
- Perimeter Bumper
- Corner Bumpers
- Various Caster Options

See page H-9 for accessory details.

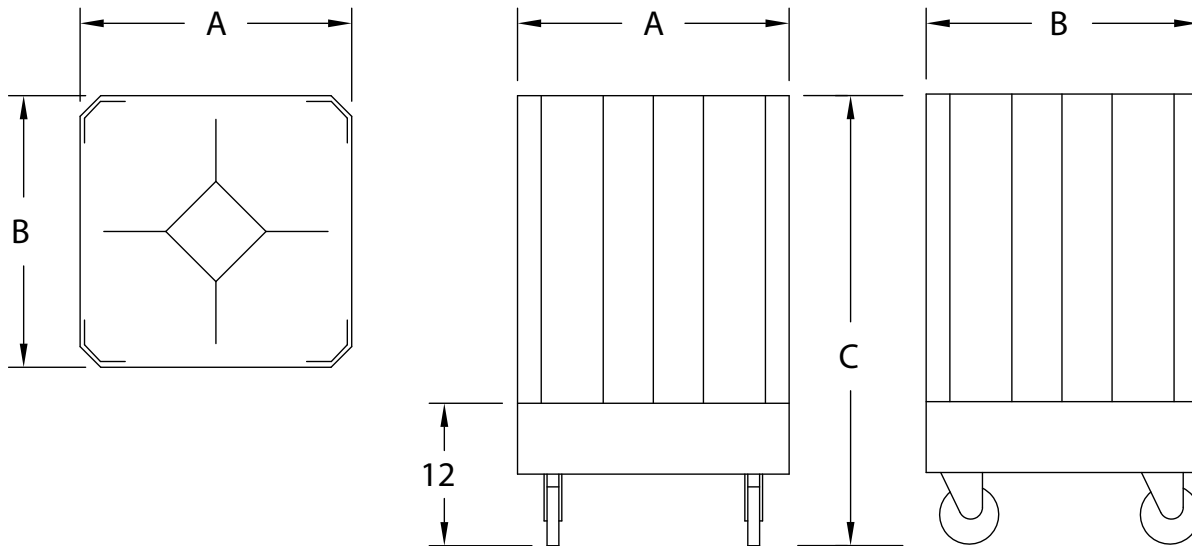

| CRES COR<br>MODEL NO. | *PLATE<br>CAP. | DISH SIZE DIA. |           | DIM "A" WIDTH |     | DIM "B" DEPTH |     | DIM "C" HEIGHT |      | WEIGHT ACT. |    |
|-----------------------|----------------|----------------|-----------|---------------|-----|---------------|-----|----------------|------|-------------|----|
|                       |                | INCHES         | MM        | INCHES        | MM  | INCHES        | MM  | INCHES         | MM   | LBS         | KG |
| 501-10-480-B          | 480            | 9-7/8 - 11     | 255 - 280 | 23            | 585 | 23            | 585 | 44             | 1120 | 65          | 29 |

\*Capacity shown is approximate; each compartment holds a 32" (815 mm) stack of banquet covers.

ALL ALUMINUM CONSTRUCTION.

**DOLLY:**

- Base and center partition: .100 aluminum.
- Center partition cover: .063 aluminum.
- Reinforcement: Formed .190 "X-frame" mounted to base.
- Corner posts and dividers: Plastic coated, extruded channels.
- Caster posts: Reinforced tubular extrusions.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

**SHORT FORM SPECIFICATIONS**

Cres Cor Banquet Ring Dolly Model 501-10-480-B with base and center post of .100 aluminum. Base reinforced with .190 aluminum "X" bracing. Plastic coated corner posts and dividers. Capacity of 480 lids 9-7/8" to 11" dia. Five inch swivel modulus casters have Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_  
\_\_\_\_. NSF listed. CSA Sanitation.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.