BEVERAGE-AIR

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

MODELS:

UCR SHALLOW DEPTH UNDERCOUNTER

UCR20HC Solid Door Undercounter Refrigerator

Hydrocarbon Series



UCR20HC

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Self-closing doors with 120° Stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Easy door removal for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handle
- 6" Casters, 2 with brakes standard
- Two (2) epoxy-coated steel wire shelves standard

OPTIONS & ACCESSORIES

- Stainless steel interior available
- 6" Legs
- 3" Casters
- Low profile caster
- Stainless steel back & grill
- Stacking collar
- Foot pedal door opener


REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric evaporator
- System is serviceable from rear
- Epoxy coated evaporator coil



MODEL	UCR20HC
EXTERNAL DIMENSIONAL DATA	
Width Overall	20"
Depth Overall with Handle & Bumper	24 1/2"
Height Overall with 6" Casters	31 1/8"
Number of Doors	1
Depth with Door Open 90 $^{\circ}$	40 3/4"
Door Opening (in)	15 5/8" x 18 1/8"
Shelf Area (sq. in)	186 1/2"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	2.28
Internal Width Overall (in)	16"
Internal Depth Overall (in)	8 1/4"
Internal Height Overall (in)	19 1/2"
Number of Shelves	2
ELECTRICAL DATA	
Full Load Amperes 115/60/1	2
REFRIGERATION DATA	
Horsepower	1/6
Capacity (BTU/Hr)*	1010
WEIGHT DATA	
Gross Weight (Created lbs)	119 lbs
Height - Crated	35"
Width - Crated	23"
Depth - Crated	23"

Undercounter Refrigerators - Shallow Depth Models: UCR20HC

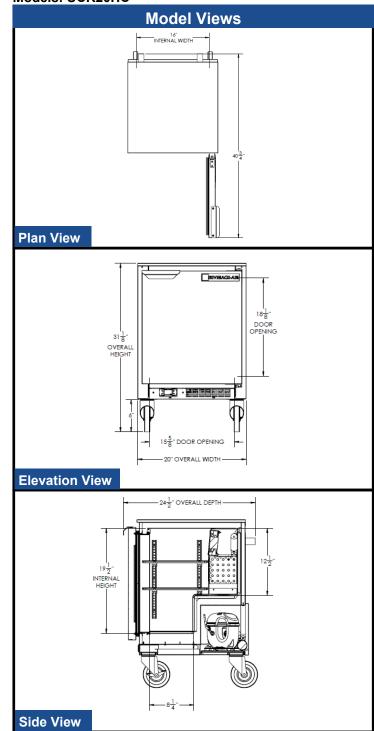

ELECTRICAL CONNECTION





Units pre-wired at factory and include 8' long cord and plug set.







3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453