EQHP-SFTN

19.8" x 4.0" x 4.0" (50.3cm x 10.2cm x 10.2cm)



- System maximum operating pressure is 125 psi (862 kPa) and operating temperature 100°F (38°C)
- Increases tea stand time
- Integrated carbon block media to reduce chlorine taste and odor
- Equipment protection from reduced sediment particles that can clog the sprayhead
- Sanitary quick connect valve-in-head design simultaneously shuts off and vents water with 1/4 turn, allowing for simple and troublefree cartridge change-outs
- Minimizes service maintenance and equipment downtime, by the reduction of scale forming minerals
- Automatic pressure relief valve makes cartridge Model EQHP-SFTN changeout easy
- Provides 1,350 grains of hardness reduction
- Perfect for low volume iced or hot tea brewers where hard water can affect tea clarity and taste

Additional Features

Agency:

Specifications

Product #: 39000.0009

Cartridge Type: Sanitary Quick Connect


Capacity

Service Flow Rate	Capacity	Micron Rating
0.5 gal/min (1.9 L/min)		5.0

Plumbing Requirements

Max Operating	Max Operating	Inlet	Outlet	
Pressure	Temperature	Connection	Connection	
125 psi (862 kPa)	100°F(38°C)	3/8 IN FNPT		




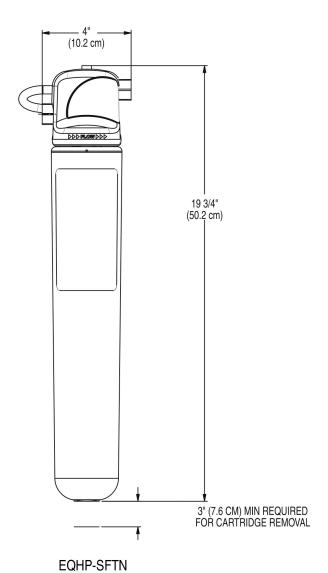

Unit			Shipping					
	Width	Height	Depth	Width	Height	Depth	Weight	Volume
English	4.0 in.	19.8 in.	4.0 in.	-	-	-	4.830 lbs	-
Metric	10.2 cm	50.3 cm	10.2 cm	-	-	-	2.191 kgs	-



Related Products & Accessories: EQHP-SFTN(39000.0009)









Model Compatibility: EQHP-SFTN(39000.0009)

Compatibility selections are currently unavailable. Please contact your sales representative to find out more information.

