

ITEM# \_\_\_\_\_

## BrewWISE® Single ThermoFresh® DBC® Brewer

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



**Single TF DBC with  
TF Server**

*(servers sold separately)*

Dimensions: 35.7" H x 12.1" W x 19.2" D  
(90.7cm H x 30.7cm W x 48.8cm D)

### Features

#### BrewWISE Brewing System with ThermoFresh Server

- Brews 1/2, 1 or 1 1/2 gallon (1.9, 3.8 or 5.7 litre) batches.
- Stores individual coffee recipes so operator can easily brew many varieties.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface through Smart Funnel® with SplashGard®
- Black and stainless models available.
- ThermoFresh servers are vacuum insulated to keep coffee hot for hours. (sold separately)
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the Recipe Writer using your PC (U.S. and English Windows compatible).
- Brew capacity varies by model. See back for details.



Stainless steel finish available.

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

International models may vary in appearance.

### Related Products

**Easy Clear® EQHP-10**  
Product No. : 39000.0004



**Easy Clear® EQHP-10L**  
Product No. : 39000.0001

**Single/Dual Filter Pack**  
Product No. : 20138.0000




**BrewWISE® Recipe Writer (BRW)**  
Product No.: 34444.0001



**Recipe Card**  
Product No.: 34447.0000  
• Program a recipe to be used on brewer or grinder.



**Ad Card**  
Product No.: 34448.0000  
• Program a message to appear on the brewer's display.



**Multi-Hopper Grinder (MHG)**



**TF Server**



## Dimensions & Specifications


Model	Product #	Volts	Amps	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
Single TF DBC*†	34800.0009	230	16.4	3775	10.1 gal/hr (38.4 l/hr)	59 lbs. (26.8 kg)	No	CE V W P G NSF
Single TF DBC	34800.0010	230	16.4	3775	10.1 gal/hr (38.4 l/hr)	59 lbs. (26.8 kg)	No	CE V W P G NSF
Single TF DBC*	34800.0011	230	16.4	3775	10.1 gal/hr (38.4 l/hr)	59 lbs. (26.8 kg)	No	CE V W P G NSF
Single TF DBC†	34800.0012	230	16.4	3775	10.1 gal/hr (38.4 l/hr)	59 lbs. (26.8 kg)	No	CE V W P G NSF
Single TF DBC*†	34800.0013	200	18.5	3700	10.1 gal/hr (38.6 l/hr)	59 lbs. (26.8 kg)	No	c UL US LISTED NSF
Single TF DBC†	34800.0016	200	18.5	3700	10.1 gal/hr (38.6 l/hr)	59 lbs. (26.8 kg)	No	c UL US LISTED NSF

\* Models have black decor. † Models with funnel locks.

**Brewing capacity:** based upon incoming water temp of 60°F (15.5°C) (140°F (60°C) rise).  
TF Servers sold separately.

Electrical: 230 volt models require 2-wires plus ground service rated 220-240V, single phase, 50/60 Hz.  
200 volt models require 2-wires plus ground service, single phase, 50Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male fitting.

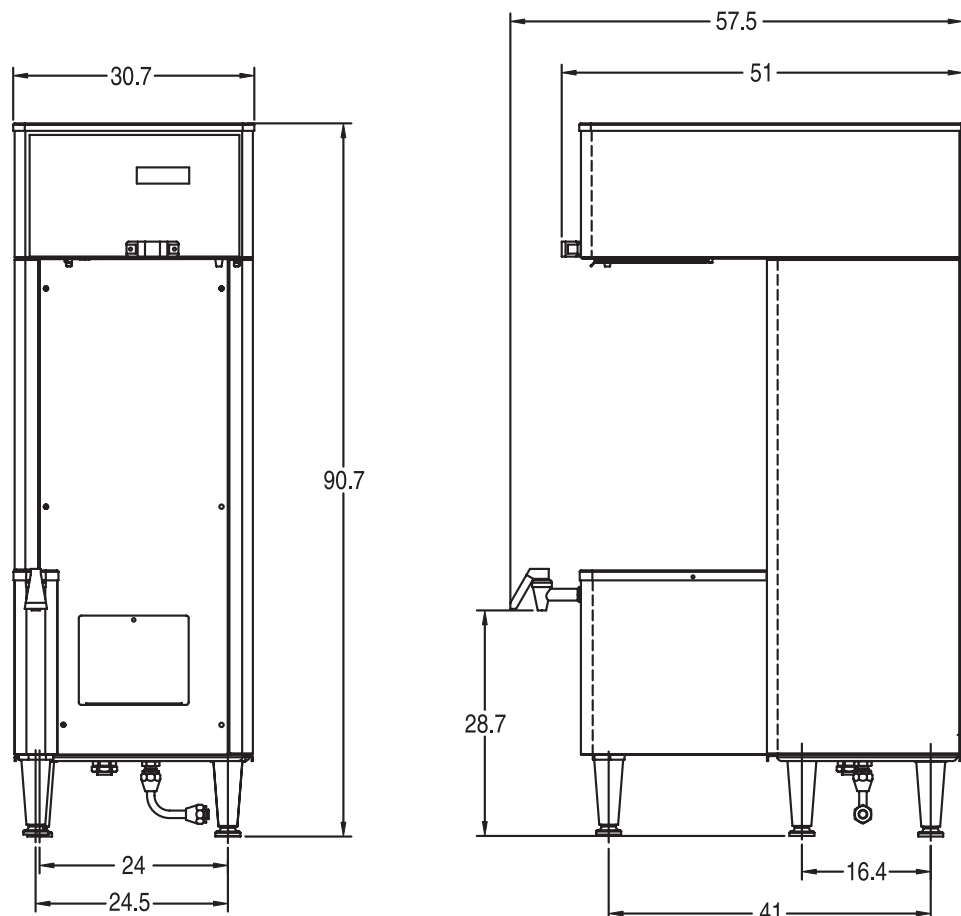

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

12/11 © Bunn-O-Matic Corporation