


Type:	Issue Date:	Project:
Part #: CTC15		



INCANDESCENT LAMPS

Decorative

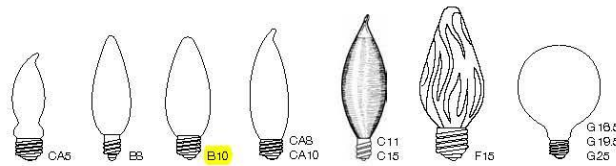

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
3 WATT												
CA5	Cand.	2502	2	CFTC3	Clear Flicker Flame	25/500	130	-	1500	-	2.88"	-
CA10	Cand.	2008	2	CFC3	Clear Flicker Flame	25/500	130	-	1500	-	4.12"	-
	Med.	2510	2	EFC3	Clear Flicker Flame	25/500	130	-	1500	-	4.12"	-
7.5 WATT												
CA5	Cand.	2005	2	CFTC7.5	Clear	50/1000	130	40	1500	C-7A	2.88"	-
CA8	Cand.	2000	2	CFCP7.5	Clear 25mm	25/500	130	35	2000	C-7A	3.58"	-
15 WATT												
B8	Cand.	1020	2	CTCP15	Clear 25mm	25/500	130	95	3000	C-7A	3.15"	-
B10	Cand.	1001	2	CTC15	Clear 32mm	25/500	130	95	3000	C-7A	3.87"	-
CA8	Cand.	2020	2	CFCP15	Clear 25mm	25/500	130	95	3000	C-7A	3.58"	-
CA10	Cand.	2001	2	CFC15	Clear 32mm	25/500	130	95	3000	C-7A	4.12"	-
G16.5	Cand.	4001	2	G16CL15	Clear	25/500	130	95	3000	C-7A	3.00"	-
		4015	2	G16WH15	White	25/500	130	90	3000	C-7A	3.00"	-
25 WATT												
B8	Cand.	1021	2	CTCP25	Clear 25mm	25/500	130	220	3000	CC-2V	3.15"	-
B10	Cand.	1003	2	CTC25	Clear 32mm	25/500	130	220	3000	CC-2V	3.87"	-
		101290	X,N,2	CTC25/ND	Clear Neodymium PureLite®	10/50	120	140	5000	CC-2V	3.87"	-
		100192	2	CTF25	Frost 32mm	25/500	130	220	3000	CC-2V	3.87"	-
	E14	121023		CTC25/E14	Clear 32mm	25/500	120	220	3000	CC-2V	3.87"	-
	Med.	1012	2	ETC25	Clear 32mm	25/500	130	220	3000	CC-2V	3.87"	-
		1013	2	ETF25	Frost 32mm	25/500	130	220	3000	CC-2V	3.87"	-
CA8	Cand.	2021	2	CFCP25	Clear 25mm	25/500	130	220	3000	CC-2V	3.58"	-
CA10	Cand.	2003	2	CFC25	Clear 32mm	25/500	130	220	3000	CC-2V	4.12"	-
		2040	2,10	CFC25/12V	Clear 32mm	25/500	12	200	2000	C-6	4.12"	-
		2004	2	CFF25	Frost 32mm	25/500	130	220	3000	CC-2V	4.12"	-
	Med.	2012	2	EFC25	Clear 32mm	25/500	130	220	3000	CC-2V	4.12"	-
		2013	2	EFF25	Frost 32mm	25/500	130	220	3000	CC-2V	4.12"	-
C11	Cand.	100210	2	C11SG25	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.02"	-
C15	Med.	100214	2	C15SG25	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.49"	-
F15	Med.	3001	2	F15CL25	Clear	25/250	130	140	3000	C-9	4.50"	-
		3003	2	F15AMB25	Amber	25/250	130	-	3000	C-9	4.50"	-
G16.5	Cand.	4002	2	G16CL25	Clear	25/500	130	220	3000	CC-2V	3.00"	-
		101270	X,N,2	G16CL25/ND	Clear Neodymium PureLite®	10/50	120	140	5000	CC-2V	3.00"	-
		4016	2	G16WH25	White	25/500	130	170	3000	CC-2V	3.00"	-
G25	Med.	5001		G25CL25	Clear	10/100	130	150	3500	C-9	4.50"	-
		5002		G25WH25	White	10/100	130	140	3500	C-9	4.50"	-

(E) Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.