



Project Name: _____ AIA#: _____ Model #: _____
Location: _____ SIS#: _____ Item #: _____ Quantity: _____



Electric Countertop Pasta Cooker / Boiling Unit

Model

☐ GPC16 - 2 Gallon Pasta Cooker / Boiling Unit

*Fresh Pasta = 12 lbs. per hour
Frozen Pasta = 10 lbs. per hour
Dry Pasta = 7.5 lbs. per hour*

Production based on lbs. of pasta per hour
(uncooked to finish). Time will vary per product.



Quality Construction

- Durable 304 stainless steel construction
- Permanently attached stainless steel boiling pot with front mounted drain
- Heavy-duty nesting bar located on control head for easy basket hanging
- Removable, easy-to-clean control box and element

Standard Features

- 2900/3800W, 208-240V
- Swing-up, locking element for easy cleaning
- Temperature settings from 75°F–215°F
- High limit thermal control with manual reset
- Twin pasta baskets with cool-to-touch insulated handles
- Digital timer
- Attached 4-foot power cord and NEMA plug

Warranty

- One-year parts and labor

Additional Optional Equipment:

Interchangeable baskets:

- ☐ MINIBASKET - Single serving / (1) small quad basket for the 2 gallon pasta cooker



GLOBE FOOD EQUIPMENT COMPANY

Countertop Pasta Cooker / Boiling Unit GPC16



GLOBE FOOD EQUIPMENT COMPANY
2153 Dryden Rd., Dayton, OH 45439
Phone: 937-299-5493 Fax: 937-299-4147
800-347-5423
www.globeslicers.com

Approved By: _____


Date: _____



Countertop Pasta Cooker / Boiling Unit

GPC16

GPC16

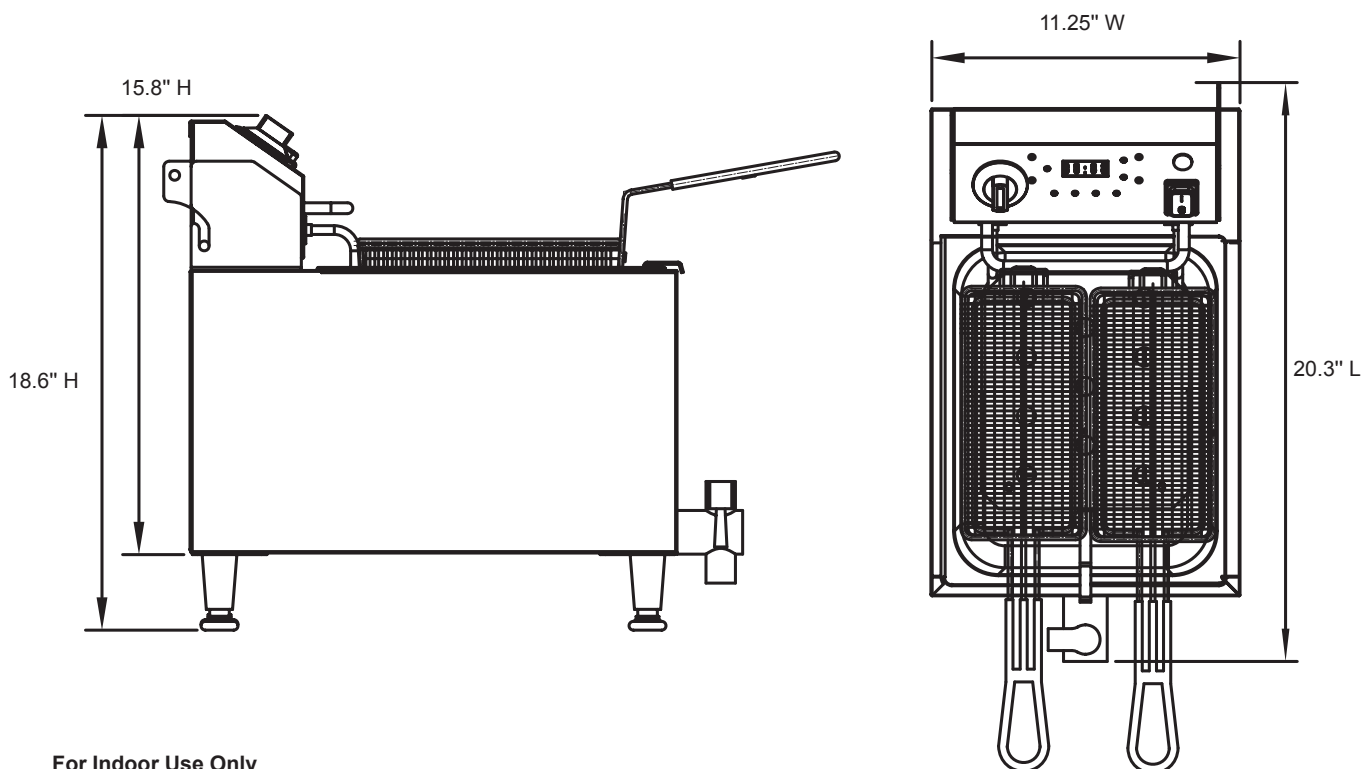

For Indoor Use Only

SPECIFICATIONS

- 304 stainless steel construction
- 15 minute digital timer
- Includes 2 fine mesh baskets

- Maximum temperature settings 212°F
- Adjustable foot for leveling unit
- Attached 4 foot power cord and plug

Model	Water Capacity	Thermostat Controls	Preheat to Boiling	Cooking Temps	Voltage	AMPs	Wattage	NEMA Plug Type
GPC16	16 lb	1	21 Min.	75° to 215°F	208/240V	15.8	2900-3800 W	6-20P (1)

IMPORTANT: This item is for boiling foods. Do not attempt to use as a fryer.

STANDARD FEATURES:

Swing Up Element: Heating element and control head swing up for easy access and cleaning of holding pot.

Electronic Timer: Timer has four adjustable timer presets. Adjust in increments of 5 seconds up to 15 minutes.

Front Pot Drain: Easily accessed pot drain located on the front of the pasta cooker for easy removal of water.

Adjustable Feet: Four (4) non-skid feet prevent the unit from sliding on the counter; feet are adjustable for leveling.

Manual Reset: Easily accessed manual reset button located on the back of the control head.

Mesh Basket:
Twin (2) fine mesh baskets included. Insulated handles for easy gripping and operator protection.
Basket (inner) measurements:
8.75" L x 4.125" W x 5.875" H

DIMENSIONS & SHIPPING INFORMATION

Carton reinforced for shipping. The weight and dimensions of reinforced carton are listed below and may vary from shipment to shipment.

Model	Foot Print	Overall Dimensions	Net Weight	Shipping Dimensions	Shipping Weight
GPC16	10.125" W x 16.5" L (26 cm x 42 cm)	20.3" L x 11.25" W x 18.6" H (52 cm x 229 cm x 46 cm)	19 lbs. (9 kg)	22.87" L x 13.7" W x 19" H (58 cm x 35 cm x 48 cm)	24.25 lbs. (11 kg)



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd.
Dayton, OH 45439
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147