

# MENUMASTER<sup>®</sup> Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Model MDC182 shown

## Heavy Volume

### Menumaster<sup>®</sup> Commercial Microwave Model MDC182

#### Power Output

- 1800 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

#### Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- Automatic Voltage Sensor adjusts to the power supply.
- See-through tempered glass door window and lighted interior for monitoring without opening the door.
- Ample .6 cubic ft. (17 liter) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Gasket sealed ceramic tray to reduce plate-to-shelf edge impact and keep spills contained.

#### Easy to Maintain

- Braille touch pads are ADA compliant.
- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-811-8559.
- ETL Listed.

### Heavy Volume

This category of microwave is ideal for...

#### Applications:

- Quick service restaurants
- Fast casual dining
- Bars & grills

#### Through put potential:

- Pre cooked frozen bacon, 700+ slices per hour
- 6 oz. portion of refrigerated Macaroni & Cheese, 40+ portions per hour
- 1 lb. batch of fresh shrimp, 30+ batches per hour
- 1 baked potato, 20+ per hour

#### Defrost:

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: [testkitchen@acpsolutions.com](mailto:testkitchen@acpsolutions.com)




AIA File #:

Specification #:



© 2017 ACP, Inc.  
Cedar Rapids, Iowa 52404

# MenuMaster® Commercial Microwave Model MDC182 | Heavy Volume

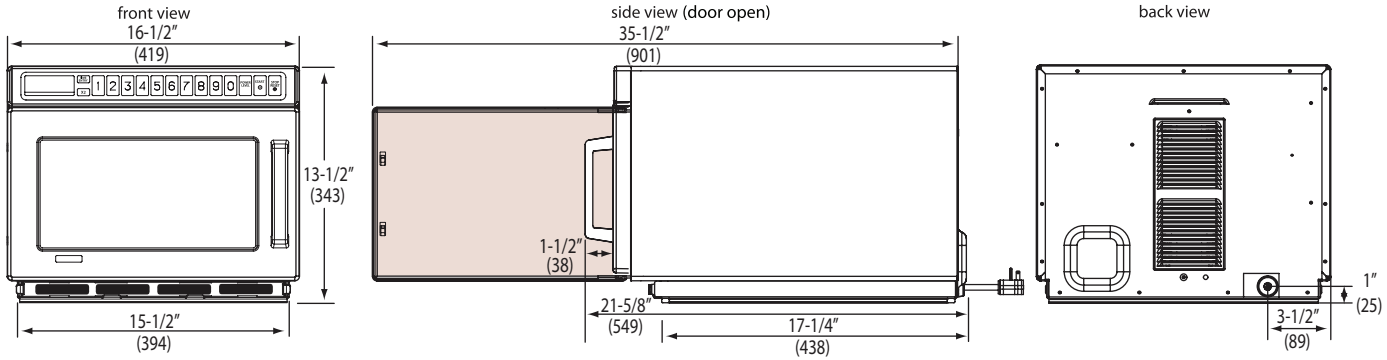

**Installation Clearances** - Top: 2" (51), Sides: 1" (25), Back: None

Specifications	
Model	MDC182   UPC Code 728028020649
Configuration	Countertop
Control System	Touch
Programmable Control Pads	10
Braille	Yes
Settings Programmable	100
Max. Cooking Time	60:00
Power Levels	11
Defrost	Yes, power level 2
Time Entry Option	Yes
Microwave Distribution	Double rotating antenna, top and bottom
Magnetrons	2
Display	LED
Stackable	Yes
Stage Cooking	Yes, 4
Interior Light	Yes
Door Opening	Grab and pull handle
Signal	Adjustable, end of cycle
Air Filter	Yes, removable, with clean filter reminder
Automatic Voltage Sensor	Yes
Multiple Portion Setting	Yes, up to 2 portions
Exterior Dimensions	H 13 1/2" (343)   W 16 1/2" (419)   D** 21 5/8" (549)
Cavity Dimensions	H 6 3/4" (171)   W 13" (330)   D 12" (305)
Door Depth	37" (940mm), 90°+ door open
Usable Cavity Space	.6 cubic ft. (17 liter)
Exterior Finish	Stainless steel
Interior Finish	Stainless steel with gasket sealed ceramic tray
Power Consumption	3000 W, 14.4 A
Power Output*	1800 W* Microwave
Power Source	208 - 240V, 60 Hz, 20 A single phase
Plug Configuration / Cord	NEMA 6-20   5' 6" (1.7m)
Frequency	2450 MHz
Product Weight	67 lbs. (30 kg.)
Ship weight (approx.)	74 lbs. (34 kg.)
Shipping Carton Size	H 18 5/8" (473)   W 21 7/8" (556)   D 24 5/8" (625)
UPS Shippable	Yes

**Specifications**  
 Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to 2 portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlight and include a temperature reading. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1800 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. An automatic voltage sensor shall accommodate both 208 and 240 volts. Heavy duty door shall have a tempered glass window and a grab and pull handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large .6 cubic ft. (17 liter) cavity shall accommodate a standard 6" (152 mm) deep half-sized pan. Gasket sealed ceramic tray to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature.

**Safety and Sanitation**

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, and FDA



**Warranty**

Warranty Certificate for this product can be found on the ACP, Inc. website at: [www.acpsolutions.com/warranty](http://www.acpsolutions.com/warranty)



**Service**

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



866-811-8559

Measurements in ( ) are millimeters

\* IEC 60705 Tested

\*\* Includes handle

Part No. 20154664  
 Updated 8/4/2017  
 Original Instructions



© 2017 ACP, Inc.  
 Cedar Rapids, Iowa 52404

Specification #:

AIA File #: