



Features

Exterior stainless steel with galvanized bottom.


Interior stainless steel with coved corners and finished edges for easy cleaning.

CFC-free, R290 refrigerant hermetically sealed, high efficiency, self contained refrigeration system.

3 Wire power cord is a standard 8 feet in length NEMA 5-15P plug.

Multiple pan configurations to meet your specific needs. (Pans purchased separately)

Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market. *

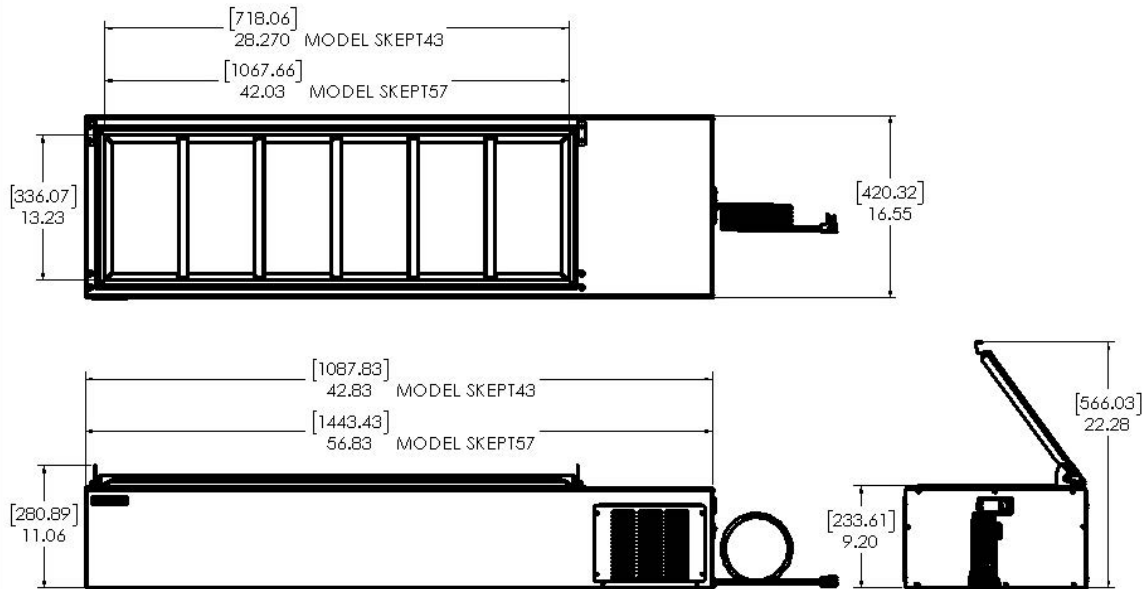

Technical Specifications

Dimensions

| Model Number | Width in (mm) | Height in (mm) | Depth in (mm) | Gross Shipping Wgt lb (kg) | Unit Shipping Wgt lb (kg) | Shipping cu ft (cu m) |
|---------------|-----------------|----------------|----------------|----------------------------|---------------------------|-----------------------|
| SKPS8A-ELUS1 | 42.83 (1087.83) | 11.06 (280.89) | 16.55 (420.32) | 100 (45.36) | 85 (38.56) | 11.61 (.329) |
| SKPS12A-ELUS1 | 56.83 (1443.43) | 11.06 (280.89) | 16.55 (420.32) | 120 (54.43) | 105 (47.63) | 14.76 (.418) |

Electrical

| Model Number | Country of Origin | Amps | Voltage | Hz | Plug | Refrigerant |
|---------------|-------------------|------|---------|----|------------|-------------|
| SKPS8A-ELUS1 | USA | 1.6 | 115VAC | 60 | NEMA 5-15P | R290 |
| SKPS12A-ELUS1 | USA | 2.2 | 115VAC | 60 | NEMA 5-15P | R290 |

Certifications



To learn more about our **Countertop Refrigerated Prep Stations**, visit silverking.com. To contact us directly, go to silverking.com/contact