


Type:	Issue Date:	Project:
Part #: T6.5FR20INT		



INCANDESCENT LAMPS

General Service

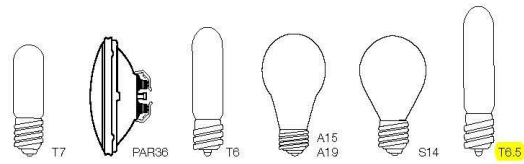

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread	
11 WATT													
S14	Med.	9051		S14CL11	Clear	25/250	130	80	5000	C-9	3.50"	-	
		9057		S14FR11	Frost	25/250	130	75	3000	C-9	3.50"	-	
		9056		S14AMB11T	Transparent Amber	25/250	130	-	3000	C-9	3.50"	-	
		9076		S14BLU11C	Ceramic Blue	25/250	130	-	3000	C-9	3.50"	-	
		9055		S14BLU11T	Transparent Blue	25/250	130	-	3000	C-9	3.50"	-	
		9070		S14GRN11C	Ceramic Green	25/250	130	-	3000	C-9	3.50"	-	
		9054		S14GRN11T	Transparent Green	25/250	130	-	3000	C-9	3.50"	-	
		106334		S14RED11C	Ceramic Red	25/250	130	-	3000	C-9	3.50"	-	
		9052		S14RED11T	Transparent Red	25/250	130	-	3000	C-9	3.50"	-	
		9058		S14WH11C	Ceramic White	25/250	130	-	3000	C-9	3.50"	-	
		106336		S14YEL11C	Ceramic Yellow	25/250	130	-	3000	C-9	3.50"	-	
		9053		S14YEL11T	Transparent Yellow	25/250	130	-	3000	C-9	3.50"	-	
15 WATT													
A15	Med.	6013		A15CL15	Clear	20/120	130	95	3000	C-9	3.50"	-	
		6014		A15FR15	Frost	20/120	130	90	3000	C-9	3.50"	-	
T6	Cand.	9030		T6CL15/CAN	Clear	25/500	130	90	2000	C-5A	3.06"	-	
		9021		T6CL15/145V	Clear	25/500	145	80	2000	C-5A	3.06"	-	
T7	Cand.	9039		T7CL15CAN	Clear	25/1000	120	100	2000	C-5A	2.25"	-	
		BA15d	9038		T7CL15DC	Clear	25/1000	120	100	2000	C-5A	2.35"	-
		Int.	9037		T7CL15INT	Clear	25/1000	120	100	2000	C-5A	2.35"	-
20 WATT													
PAR36	Screw Term.	107788	\$.17	HP36NSP20/HX	Narrow Spot HaloXen®	12	12	260	5000	C-6	2.75"	12°	
		107790	\$.17	HP36VNSP20/HX	Very Narrow Spot HaloXen®	12	12	260	5000	C-6	2.75"	5°	
		107792	\$.17	HP36WFL20/HX	Wide Flood HaloXen®	12	12	260	5000	C-6	2.75"	32°	
T6.5	BA15d	9022		T6.5CL20DC	Clear	25/500	130	150	2500	C-8	5.56"	-	
		9023		T6.5FR20DC	Frost	25/500	130	150	2500	C-8	5.56"	-	
	Int.	9019		T6.5CL20INT	Clear	25/500	130	150	2500	C-8	5.50"	-	
		9028		T6.5FR20INT	Frost	25/500	130	150	2500	C-8	5.50"	-	
25 WATT													
A15	Med.	6016		A15CL25	Clear	20/120	130	130	3000	C-9	3.50"	-	
		6015		A15FR25	Frost	20/120	130	120	3000	C-9	3.50"	-	
A19	Med.	6318		A19CL25/5	Clear	120	130	175	5000	C-9	4.25"	-	
		103700	A1	A19FR25	Frost	120	130	160	1500	C-9	4.25"	-	
		6319		A19FR25/5	Frost	120	130	150	5000	C-9	4.25"	-	
		101159	10	A19FR25/12V	Frost	12/240	12	240	2000	C-6	4.25"	-	
		101150		A19BLU25T	Transparent Blue	12/120	130	-	2000	C-9	4.25"	-	

Ⓢ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.