

BOLDER



BOTTOM-MOUNTED

REACH-IN SOLID DOOR REFRIGERATORS

33 ~ 41°F



— DFS# 5002949 —

Features & Benefits

- Equipped with Locking Doors
- Reversible Doors
- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41°F degrees Fahrenheit.
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.

Technical Specifications

Voltage/Frequency	115V / 60Hz	Total Input Power	260W
Refrigerant	R290	Total Current	3.1A
Type of defrosting	Automatic	Climatic Category	4-5
Exterior Finish	Stainless Steel	Protection Type	I
Interior Finish	Stainless Steel	Design Pressure High Side	300 PSIG
		Design Pressure Low Side	150 PSIG
		Insulation Blowing Gas	C-Pentane



Tel: (888) 553-9255


Mail: service@bolder-refrigeration.com

BOLDER

www.bolder-refrigeration.com

BOTTOM-MOUNTED REACH-IN SOLID DOOR REFRIGERATORS

— DFS# 5002949 —

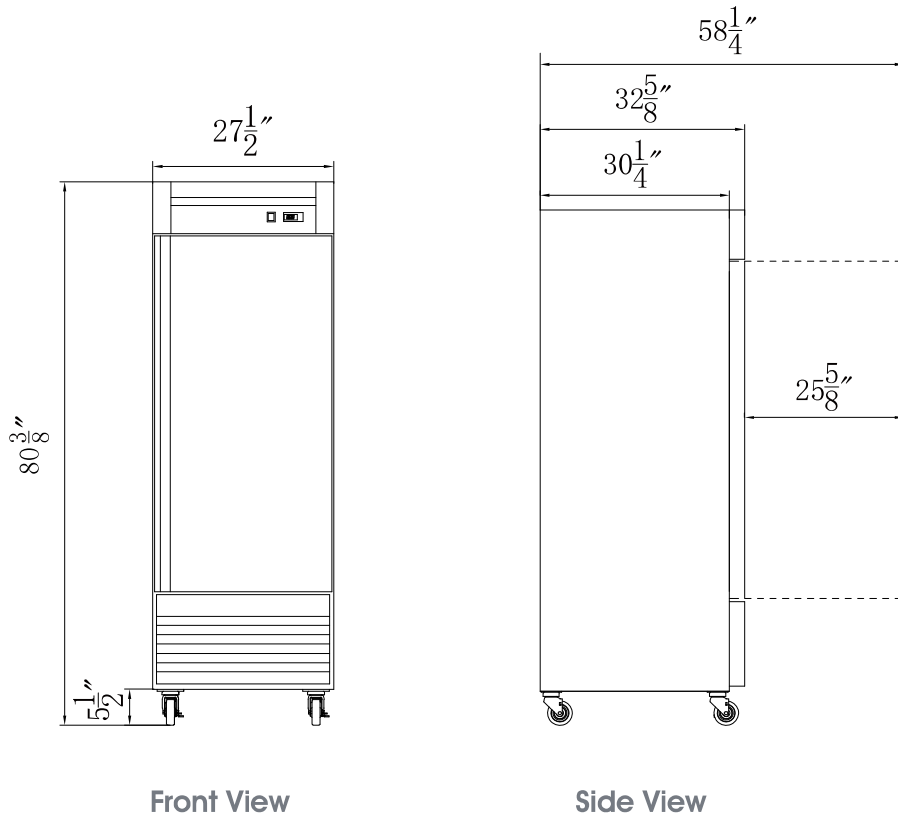

Technical Specifications

Voltage/Frequency	115V / 60Hz	Total Input Power	260W
Refrigerant	R290	Total Current	3.1A
Type of defrosting	Automatic	Climatic Category	4-5
Exterior Finish	Stainless Steel	Protection Type	I
Interior Finish	Stainless Steel	Design Pressure High Side	300 PSIG
		Design Pressure Low Side	150 PSIG
		Insulation Blowing Gas	C-Pentane

BOTTOM-MOUNTED REACH-IN SOLID DOOR REFRIGERATORS

Model	External Dimensions (inches)			Packing Carton (inches)			Temperature Range (°F)	Compressor Power (HP)	Net Weight (lbs)	Gross Weight (lbs)	# of Shelves	NEMA Config.	Capacity (cu ft)	40HQ Container Certification
	W	D	H	W	D	H								
DFS# 5002949	27 1/2	32 5/8	80 3/8	29 1/8	34 1/4	87 3/8	33 ~ 44	1/5	287	338	4	5-15P	18.75	39



Tel: (888) 553-9255

Mail: service@bolder-refrigeration.com

BOLDER

www.bolder-refrigeration.com