



**TRUE FOOD SERVICE  
EQUIPMENT, INC.**

2001 East Terra Lane • P.O. Box 970 • O'Fallon, Missouri 63366  
(636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546  
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

A/A #

SIS #

Model:  
**TR2HRI-2S**

**TR Spec Series:**  
*Roll-In Solid Swing Door Heated Cabinet*



**TR2HRI-2S**

- ▶ Provides cabinet holding temperature of 80°F to 180°F (26.6°C to 82.2°C).
- ▶ Equipped with low-velocity fans to assure even temperature distribution throughout the cabinet. Fans are controlled by exterior on/off switch.
- ▶ Two (2) stainless steel 1000 watt finned tube heating elements per section for uniform generation of electric heat. Cabinet comes with a total of 4000 watts.
- ▶ 300 series stainless steel exterior front, back, bottom and interior. The very finest stainless with higher tensile strength for fewer dents and scratches.
- ▶ Three (3) lifetime guaranteed, cam-lift hinges per door. Full 180° open capability with a stay open feature at 120°.
- ▶ Designed to accept roll-in racks (inboard castors) with a maximum dimension of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm). One (1) heavy gauge stainless steel ramp standard (per door).
- ▶ Insulation - entire cabinet construction and solid doors are foamed-in-place using Ecomate. A new, innovative, high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

**ROUGH-IN DATA**

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Capacity (Cu. Ft.) (liters)	Cabinet Dimensions (inches) (mm)			Watts	Voltage	Cord Length (total ft.) (total m)	Crated Weight (lbs.) (kg)
			L	D†	H*				
TR2HRI-2S	2	75 2124	68 1728	34½ 877	83¾ 2128	4000	115/208-230/60	9 2.74	N/A N/A

† Depth does not include 4 1/4" (108 mm) for ramp.  
\* Height does not include 1" (26 mm) for system mechanical components.  
Requires 115/208-240/60 Hz, single phase, 3 pole, 4 wire circuit.  
note: TR2HRI-2S requires hard wiring.

	<b>APPROVALS:</b>	<b>AVAILABLE AT:</b>
	Printed in U.S.A.	

Model:  
**TR2HRI-2S**

**TR Spec Series:**  
Roll-In Solid Swing Door Heated Cabinet



## STANDARD FEATURES

### DESIGN

- True's solid door roll-in heated cabinets are designed with enduring quality that protects your long term investment.

### HEATER SYSTEM

- Cabinet is designed to provide holding temperatures of 80°F to 180°F (26.6°C to 82.2°C). Heating system controlled by exterior on/off switch and temperature control dial.
- Two (2) stainless steel (for corrosion resistance), finned tube heating elements (1000 watts each) per section for uniform generation of electric heat. Cabinet comes with a total of 4000 watts.
- Equipped with low-velocity fans to assure even temperature distribution throughout the cabinet. Fans are controlled by exterior on/off switch.
- Manually controlled vent located on top of the cabinet for positive humidity control.

### CABINET CONSTRUCTION

- Exterior - 300 series stainless steel door(s), front, back and bottom. Stainless steel sides.
- Interior - 300 series stainless steel liner and floor.
- Stainless steel breaker caps.
- Insulation - entire cabinet structure and solid door(s) are foamed-in-place using high density, CFC free, polyurethane insulation.
- One (1) heavy gauge stainless steel ramp per door.
- Designed to accept roll-in racks (inboard castors) with a maximum dimension of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm).

### DOORS

- 300 series stainless steel exterior and liners. Doors open within cabinet dimension.
- Door locks standard.
- Lifetime guaranteed recessed door handles. Each door fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Three (3) lifetime guaranteed, cam-lift hinges per door. Full 180° open capability with a stay open feature at 120°.

- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.
- Doors are field reversible.

### LIGHTING

- Incandescent interior lighting; lights activated by exterior on/off switch, safety shielded.

### MODEL FEATURES

- Exterior, color coded, temperature display; accurate direct reading of internal cabinet temperature.
- Designed to hold warm baked or cooked food. Cabinet is not designed to heat ambient or cold product.
- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- 12" x 20" (305 mm x 508 mm) pan for water included, if additional humidity is required.
- NSF-4 compliant for open food product.

### ELECTRICAL


- True requires that a sole use circuit be dedicated for the unit.
- Unit comes with 4 feed wires (including ground) to be hardwired at installation site to a 115/208-240/60 Hz. single phase, 20 amp dedicated outlet.

### OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- Metal door handle(s) (factory installed).
- Electronic temperature control (factory installed).
- Correctional facilities options.

## PLAN VIEW

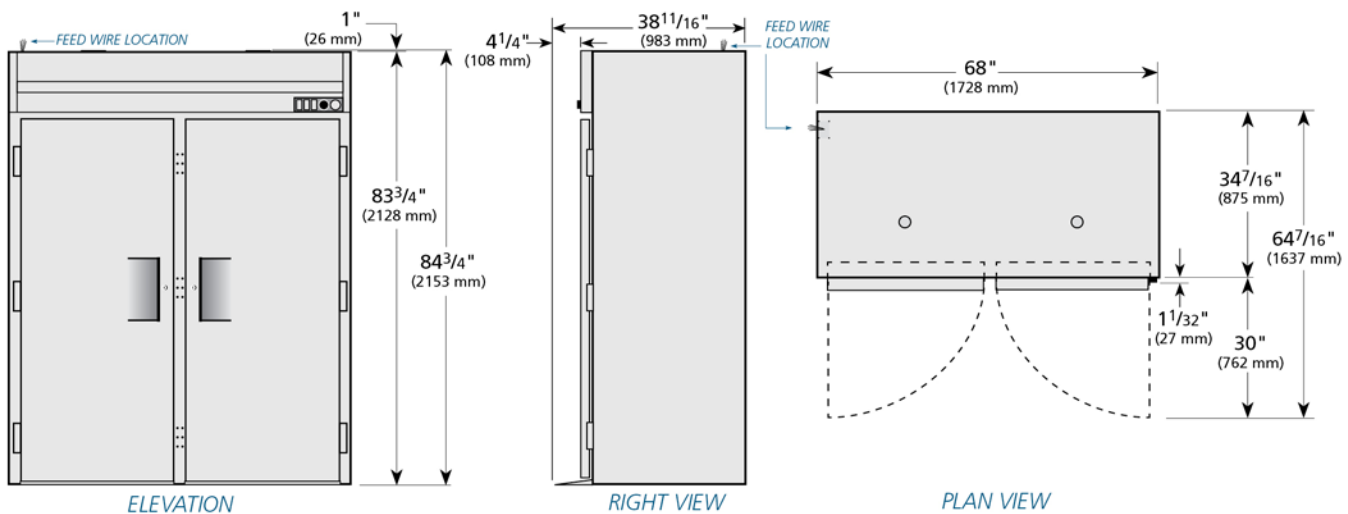

**WARRANTY**  
One year warranty on all parts and labor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
TR2HRI-2S	TFQY97E	TFQY51S	TFQY155P	TFQY1553	

## TRUE FOOD SERVICE EQUIPMENT