

- ▣ ARMD-35A-SD
- ▣ ARMD-47A-SD
- ▣ ARMD-69A-SD

## STANDARD FEATURES

### ⌘ DURABLE CONSTRUCTION

Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white paint. Also available in black as special order from factory.

### ⌘ ERGONOMICALLY DESIGNED SLIDING DOORS

"Low E" double pane thermal insulated glass doors with a self-closing and counter balanced system for convenience and efficiency.

### ⌘ ANALOG CONTROLLER

This temperature control system allows customers to keep the utmost food quality for a longer period of time.

### ⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® CFC-Free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

### ⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F. ARMD-69-SD use R-404A.

### ⌘ BOTTOM MOUNT COMPRESSOR

Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

### ⌘ SHELVES

Adjustable epoxy coated wire shelves.

### ⌘ LED LIGHT

"Low-E" consumption LED interior lights lasts up to 10 times longer compared to fluorescent light, providing greater visibility, shadow-free illumination and enhanced product display.

### ⌘ ILLUMINATED LED SIGN PANEL

This LED back-lit panel adds a pleasant atmosphere to your store or restaurant while helping your product stand out. Allows for easy customization.




ARMD-35A-SD




ARMD-47A-SD

## OPTIONS & ACCESSORIES


- Additional epoxy coated shelves
- 2.5" Casters / 4" Casters
- 6" Adjustable stainless steel legs
- 220V-50 cycles- 1 phase



MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Length	Cabinet Dimensions			Shipping		
									W"	D"	H"	Wt. lbs.	Cubes	
<b>REFRIGERATORS</b>														
ARMD-35A-SD	2	35	8	6.9	1/3	115/60/1	5-15P	8'	43 1/2"	32"	78 5/8"	347	75	
ARMD-47A-SD	2	47	8	6.9	1/3	115/60/1	5-15P	8'	54"	32"	78 5/8"	391	94	
ARMD-69A-SD	3	69	12	10.3	1/3	115/60/1	5-15P	8'	85 15/16"	32"	78 5/8"	560	140	

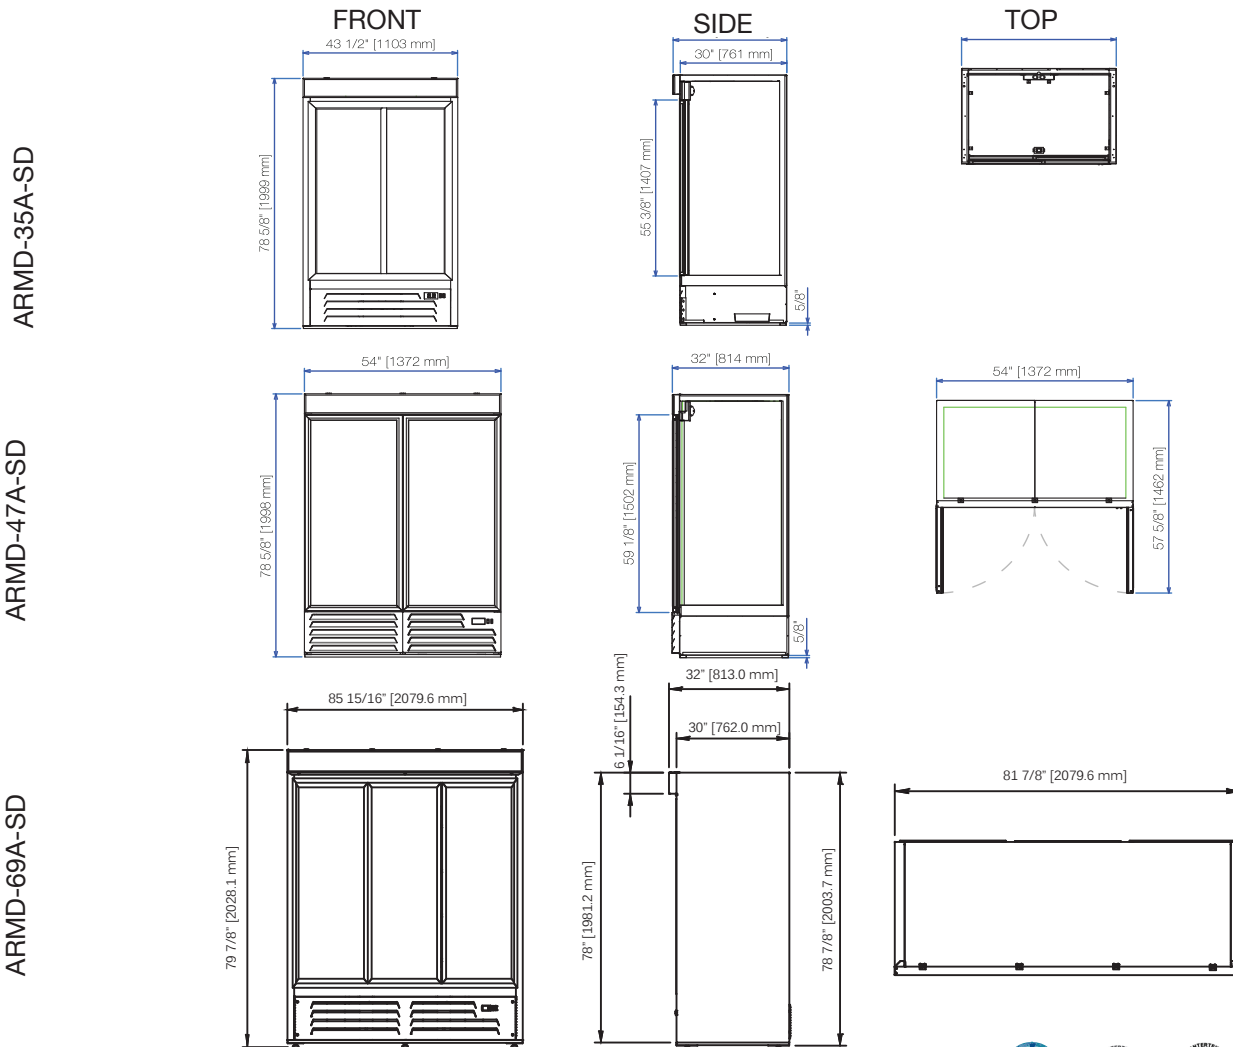

## \* Specifications



### ④ CONSTRUCTION

- Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white vinyl. Also available in black as special order from factory.
- "Low-E" consumption LED interior lights lasts up to 10 times longer compared to flourescent light, providing greater visibility, shadow-free illumination and enhanced product display.

### ④ DOORS & SHELVES

- "Low E" double pane thermal insulated glass doors with a self-closing and counter balanced system for convenience and efficiency.
- Adjustable epoxy coated wire shelves.

### ④ REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F. ARMD-69-SD use R-404A.
- Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- Large fan motor and fan blades for better air circulation.

- Analog temperature control system allows customers to keep the utmost food quality for a longer period of time.
- Ecomate® CFC-Free plyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

### ④ ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

### ④ WARRANTY

- Continental USA & Canada:
- **One year:** Labor and parts warranty.
  - **Five year:** Compressor warranty.
  - **International:** One year parts only.

\* Asber's specification are subject to change without notice as we continue to make product improvements.