# **BUNN**°

## BrewWISE® Single ThermoFresh® DBC Brewer

ITEM# **PROJECT** 

DATE



### Model Single TF DBC with 1.5 gallon TF Servers\*

(servers sold separately) Dimensions: 35.7" H x 12.1" W x 19.2" D (90.7cm H x 30.7cm W x 48.8cm D)

#### Features

#### BrewWISE® Brewing System with ThermoFresh® Servers

- Brews 6.2 to 11.4 gallons (23.5 to 43.2 litres) of perfect coffee per hour.
- Brews <sup>1</sup>/<sub>2</sub>, 1 or 1<sup>1</sup>/<sub>2</sub> gallon (1.9, 3.8 or 5.7 litre) batches.
- Stores individual coffee recipes so operator can easily brew many varieties.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®
- Black and stainless models available.
- ThermoFresh servers are vacuum insulated to keep coffee hot and fresh for hours.
- · Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the Recipe Writer using your PC (Windows compatible).



Stainless steel finish available

For current specification sheets and other information, go to www.bunn.com.

\* International models may vary in appearance.

### Related Products

Easy Clear® EQHP-10 Product No.: 39000.0004

Easy Clear® EQHP-10L Product No.: 39000.0001



#### BrewWISE® Recipe Writer (BRW)

Product No.: 34444.0000

Dimensions:

23/16" H x 63/8" W x 91/2" D 5.56 cm H x 16.2 cm W x 24.1 cm D



Intl. Product No.: 33700.0005

Product No.: 33700.0000

**G9-2T DBC** 

**G9-2TA DBC** 

· Grinder holds 6 pounds each of regular and decaf or specialty beans



#### Single/Dual Filter Pack

Product No.: 20138.0000 Packed per case: 500 Dimensions:

51/4" Base x 41/4" Sidewall 13.3 cm Base x 10.8 cm Sidewall



#### Ad Card

Product No.: 34448.0000

• Program a message to appear on the brewer's display.





Model **Agency Listing** Single TF DBC (UL) LISTED (NSF.)

# Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Funnel Locks	Cord Attached
Single TF DBC	34800.0000	120/240	16.6	4000	4000	11.4 gal/hr	4.4	59 lbs.	Yes	No
Single TF DBC'	34800.0001	120/240	16.6	4000	4000	11.4 gal/hr	4.4	59 lbs.	Yes	No
Single TF DBC	34800.0002	120/208	19.2	4000	4000	11.4 gal/hr	4.4	59 lbs.	No	No
Single TF DBC	34800.0003	120/208	19.2	4000	4000	11.4 gal/hr	4.4	59 lbs.	Yes	No
Single TF DBC'	34800.0004	120/240	16.6	4000	4000	11.4 gal/hr	4.4	59 lbs.	No	No
Single TF DBC	34800.0008	120	18.1	2200	2200	6.2 gal/hr	4.4	59 lbs.	Yes	Yes**
Single TF DBC	34800.0017	120	18.1	2200	2200	6.2 gal/hr	4.4	59 lbs.	Yes	Yes**
G9-2T DBC	33700.0000	120	9.4	n/a	1080	n/a	5.9	67 lbs.	n/a	Yes
G9-2T DBC*	33700.0001	120	9.4	n/a	1080	n/a	5.9	67 lbs.	n/a	Yes
TF Server	39550.0050	n/a	n/a	n/a	n/a	1.5 gallons	2.8	13.8 lbs.	n/a	No
TF Server*	39550.0051	n/a	n/a	n/a	n/a	1.5 gallons	2.8	13.8 lbs.	n/a	No


<sup>\*</sup> Models have black finish. \*\*Power cord (NEMA 5-20P) 20 amp - 120 volt **Brewing capacity:** based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Grinder is 2-wires plus ground service rated 120V, 60Hz, circuit required, ¾ HP motor.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with  $\frac{3}{8}$  male fitting.

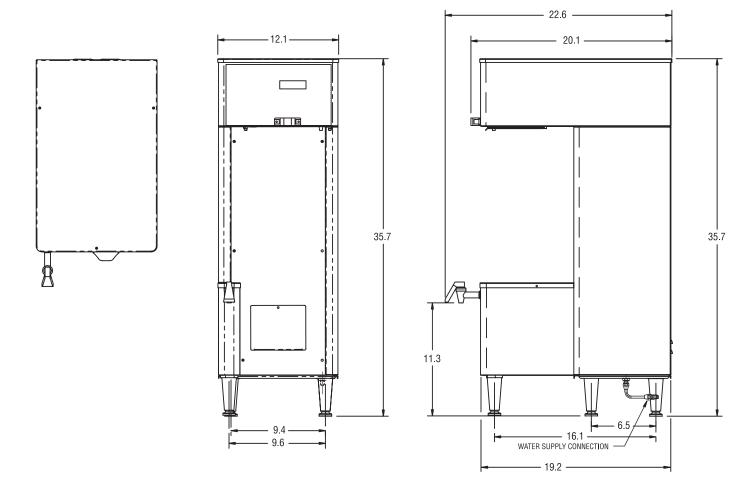

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.