TOASTER OVEN

CONCEPT

- ❑ Ideal for melting, warming and toasting
- ❑ One or two shelf snack toasters feature top and bottom infra-red heat
- ❑ 15-minute timer for controlled operation with a continuous mode
- ❑ Compact footprint
- ❑ Stainless steel exterior and interior construction
- ❑ One or two wire racks and crumb tray included
- ❑ Open-style models furnished with heat-resistant removable rack handles
- ❑ TS327 has removable heat shield at top compartment

TS-127 208/240 V

TS-327 208/240 V

BAR-100 120 or 208/240 V

BAR-200 120 or 208/240 V

BAR-106/1 120 V

BAR-206/1 120 V

765 WESTMINSTER STREET PROVIDENCE, RI 02903
TEL: (401)273-3300 FAX: (401)273-3328 E-mail: sales@equipex.com
www.equipex.com

sodir ROLLER GRILL

TOASTER OVENS

BAR-100
BAR-106

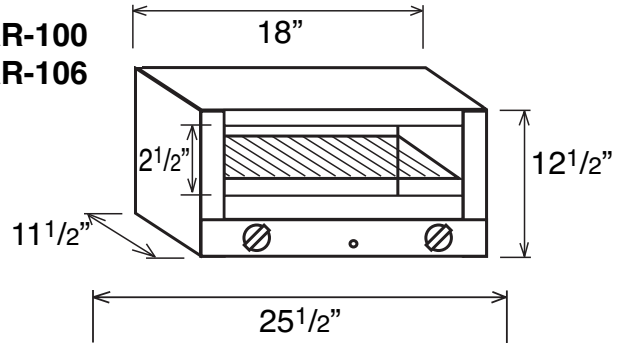

BAR-200
BAR-206

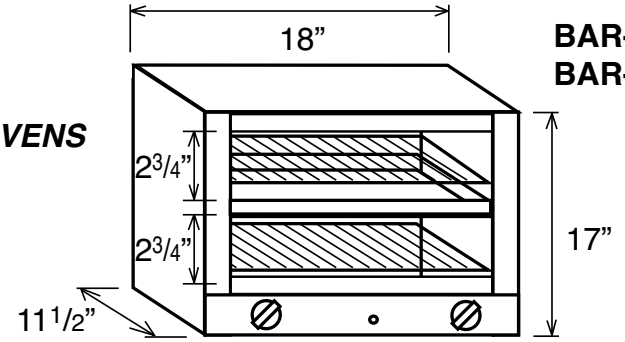

TS-127

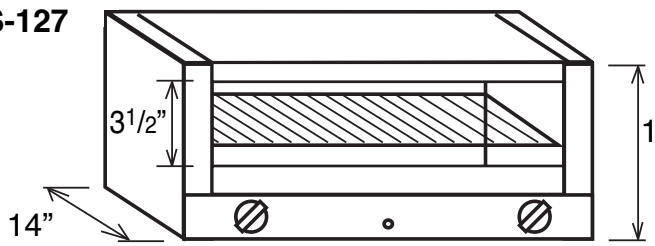

TS-327

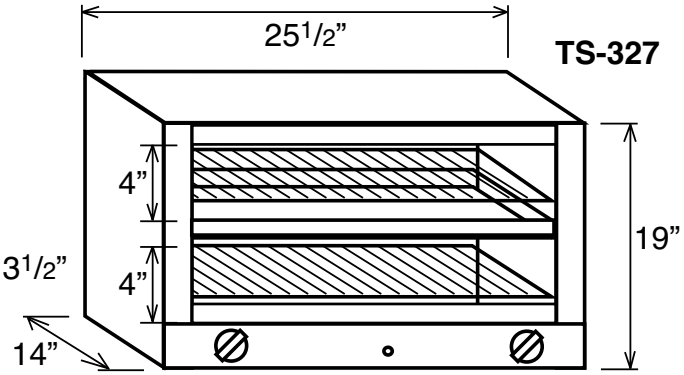

SPECIFICATIONS

- INSTALLATION CLEARANCE: 2” EACH SIDE, TOP AND BACK
- TS SERIES HAS 4” EXTENDED HANDLES IN FRONT

MODEL	ELECTRICAL	DIMENSIONS	WORK SURFACE	SHIPPING WEIGHT	NEMA PLUG
BAR 100/1	120V, 1PH 1.7KW, 14 Amps	18”Wx11 1/2”Dx12 1/2”H	13 3/4”x9 3/4”	24 lbs	5-15 P
BAR 100	208/240V, 1PH 2KW, 7/9 Amps	18”Wx11 1/2”Dx12 1/2”H	13 3/4”x9 3/4”	24 lbs	6-15 P
BAR 200/1	120V, 1PH 1.7KW, 14 Amps	18”Wx11 1/2”Dx17”H	(2) 13 3/4”x9 3/4”	28 lbs	5-15 P
BAR 200	208/240V, 1PH 3KW, 11/13 Amps	18”Wx11 1/2”Dx17”H	(2) 13 3/4”x9 3/4”	28 lbs	6-15 P
BAR 106/1	120V, 1PH 1.1KW; 10 Amps	18”Wx11 1/2”Dx12 1/2”H plus 4” for handle	13 3/4”x9 3/4”	25 lbs	5-15P
BAR 206/1	120V, 1PH 1.65KW, 14 Amps	18”Wx11 1/2”Dx17”H plus 4” for handle	(2) 13 3/4”x9 3/4”	30 lbs	5-15P
TS-127	208/240V, 1PH, 3.5KW, 15/17 Amps	25 1/2”Wx14”Dx13 1/2”H	20”x13”	40 lbs	6-20P
TS-327	208/240V, 1PH, 4.6KW, 20/22 Amps	25 1/2”Wx14”Dx19”H	(2) 20”x13”	50 lbs	L6-30P

WARRANTY: Limited one year parts and labor

EQUIPEX

765 WESTMINSTER STREET PROVIDENCE, RI 02903
TEL: (401)273-3300 FAX: (401)273-3328 E-mail: sales@equipex.com
www.equipex.com

c UL us LISTED CLASSIFIED c UL us NSF 4