

THERMOSTATIC GAS GRIDDLE



MG-48-T

- ☐ MG-24-T
- ☐ MG-36-T
- ☐ MG-48-T
- ☐ MG-60-T
- ☐ MG-72-T

Standard Features

- Stainless steel #430 construction.
- 30,000 BTU (NAT/LP) burner per 12".
- Polished steel cooking surface.
- Manually controlled, Independent cooking zones.
- Large, robust dial controls.
- Stainless steel burners.
- Fully insulated lining and burner box.
- Thermostat control valve: 200°F - 575°F range.
- Removable waste tray.
- 3/4" rear gas connection.
- Flame failure.
- Full size back flue guard.

Warranty:

- Spare Parts Warranty - 12 Months;
- The warranty covers electric and gas components for 12 months.
 - Labor costs are not included in the warranty.
 - Accessories are not covered by the 12 month

STANDARD CONSTRUCTION SPECIFICATIONS

Griddle Plate: 18", 24", 36", 48", 60", 72" wide unit with one 30,000 BTU (NAT or LP) burners every 12" on thermostatic griddle. Fully welded, polished steel griddle plate with side splash guards, and grease drawer.

Griddle Controls: Independent, "Insta-on" thermostatic controls with uniform temperature range of 200°F to 550°F. (Thermostatic models ONLY)

Exterior Finish: Stainless steel #430 construction.


Flue Riser: 11" high stainless steel flue riser.

Legs: 6" stainless steel adjustable legs standard.



Approval Notes: _____

MG-48-T

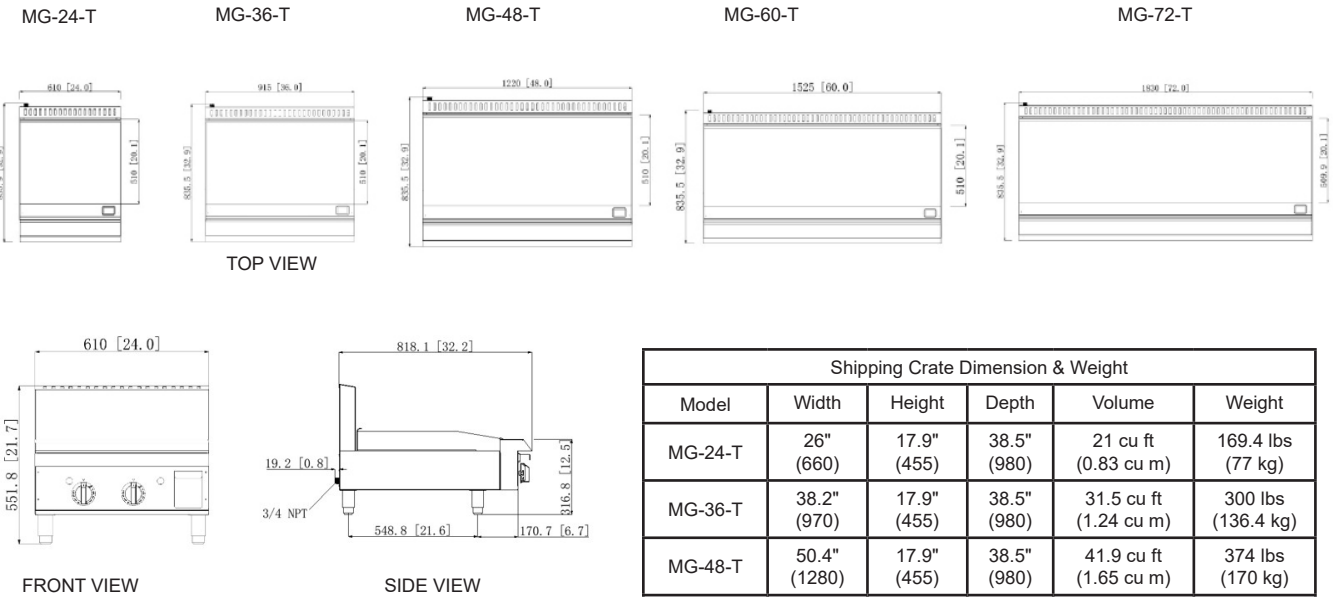

UTILITY INFORMATION

GAS: Each unit has a front manifold that couples to the adjacent sectional unit(s), and a 3/4" rear gas connection with a male NPT connector. Minimum gas supply pressure is 7" W.C. for natural gas and 11" W.C. for propane. All sectional units require a regulated gas supply . If using a flexible-hose gas connection, the inside diameter of the hose must not be smaller than the connector on the unit and must comply with ANSI Z21.69, providing an adequate means of restraint to prevent undue strain on the gas connection.

GAS (BTU/HOUR)		
Model	NATURAL	PROPANE
MG-24-T	60,000	60,000
MG-36-T	90,000	90,000
MG-48-T	120,000	120,000
MG-60-T	150,000	150,000
MG-72-T	180,000	180,000

MISCELLANEOUS

- If casters are used with a flexible-hose gas connection, a restraining device should be used to prevent undue strain on the hose.
- For use in non-combustible locations only
- Noncombustible unit clearances: 0" (0 mm) sides and rear - 4"(102mm) floor
- Installation under a vented hood is recommended.
- Check local codes for fire and sanitary regulations.

NOTICE:

Mercury has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.

