

True Ice Series

Modular Commercial Cube Ice Machine

Model: **TCIM-622**



TrueTouch®

AIR-COOLED • TCIM-622-HA1-A

(Shown on a TIB-422 ice bin. Sold separately.)


22" W x 24" D x 27" H
(56 x 61 x 69 cm)



CUBE SIZES


HALF

7/16" x 1-1/8" x 7/8"
(11.1 x 28.6 x 22.2 mm)



FULL

7/8" x 7/8" x 7/8"
(22.2 x 22.2 x 22.2 mm)



LARGE

1-1/8" x 1-1/8" x 7/8"
(28.6 x 28.6 x 22.2 mm)



- Produces up to **630 lbs (286 kg)** of ice per 24 hours
- Exceeds ENERGY STAR® standards by **up to 37%**
- Eco-friendly **R290** refrigerant: **4.9 oz (139 g)**
- **One-touch** cleaning

FEATURES & BENEFITS

► Maximum Efficiency & Superior Sanitation

- **Patented TrueNcapsuL8® Evaporator:** Fully insulated and sealed for maximum efficiency while inhibiting the growth of mold, bacteria, and biofilm on the backside of the evaporator plate.
- **Industry-leading cycle times:** fast ice production with no harvest assist required.
- **Wide Operating Range:** **35 °F to 110 °F (1.6 °C to 43.3 °C).**
- **TrueGuard™ Antimicrobial Protection:** Integrated into molded components, storage bin liner, and bin door.
- **TrueZone®:** Continuous air purification in the food zone and storage bin with growth-inhibiting technology.
(Optional accessory, sold separately).
- **One-touch cleaning** and tool-free removable components for simplified cleaning and maintenance.

► Monitoring, Programming & Predictive Diagnostics

- **TrueTouch® Smart Touchscreen:** 4.3 in (11 cm) display featuring real-time ice level monitoring, live system status, and diagnostics without complex error codes.
- **Time-of-Flight (ToF) Technology:** Real-time ice level and usage monitoring to **right-size equipment and maximize efficiency**, eliminating the need for thermostat kits.
- **Ice production scheduling.**
- **Gauge-Free Diagnostics:** Integrated high- and low-pressure transducers allow **service without external gauges.**
- **Real-Time Alerts:** Visual, audible, and push notifications.

► Remote Monitoring*

- **TrueConnect®:** Remote access to system data enables **predictive diagnostics and proactive maintenance**, identifying potential issues before they impact operations.
- **Location-based performance optimization.**
- Remote **shutdown** capability.

*Coming soon to the marketplace.


True Ice Series

Modular Commercial Cube Ice Machine

Model: **TCIM-622**




PLAN VIEW

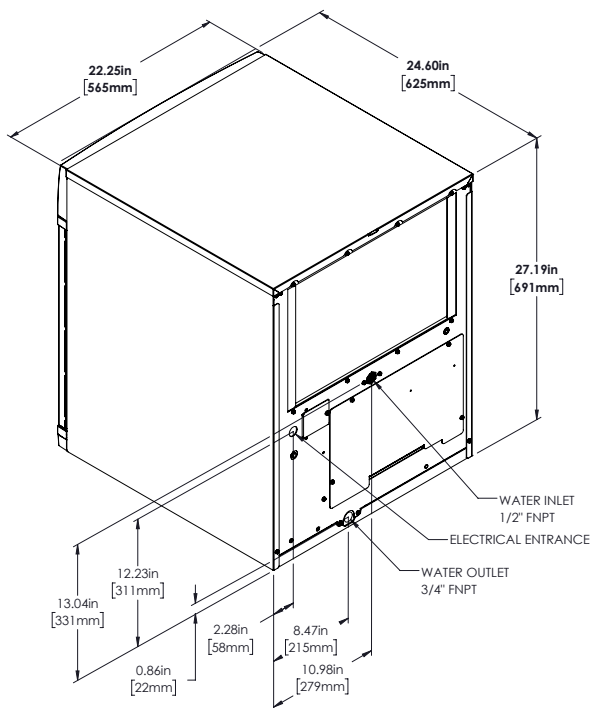

CLEARANCE

PLEASE NOTE: air-cooled units **require 6" (152.4mm)** clearance for air intake and exhaust on the left, right, and back sides.

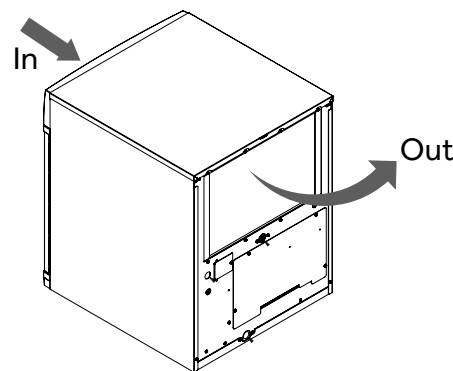

ADDITIONAL FEATURES

- **TrueTech®** clear-coated exterior: Corrosion and fingerprint resistant
- **Removable air filter** and RCU technology
- **Micro-channel condenser** for superior efficiency
- **Ultra-quiet fan operation**

SPECIFICATIONS

AIR COOLED			ICE PRODUCTION / 24 HOURS				Peak Heat of Rejection BTU/hr
True Ice Series Model	Cube Size	Crated Weight (lbs)	70°F Air / 50°F Water (21° Air / 10°C Water)	90°F Air / 70°F Water** (32° Air/21°C Water)			
			Ice Production (lbs)	Ice Production (lbs)	Potable Water Consumption/100lb	Electrical Consumption/100lb	
TCIM-622-HA1-A •	Half	184 (84 kg)	630 (286 kg)	544 (247 kg)	14.2 gal	4.15 kWh	8,500
TCIM-622-FA1-A	Full		615 (279 kg)	525 (238 kg)		4.30 kWh	
TCIM-622-LA1-A	Large		600 (272 kg)	505 (229 kg)		4.45 kWh	

• Energy Star Model

ELECTRICAL		CONNECTIONS	
Voltage	Min Circuit Ampacity	Potable Water In	1/2" Female NPT
115/60/1	15	Water Out	3/4" Female NPT
		Electrical Connection Junction Box	104-127 VAC/60Hz/1

OPERATING REQUIREMENTS		
	Minimum	Maximum
Ambient Air Temp	35°F (1.7°C)	110°F (43.3°C)
Water Temp	35°F (1.7°C)	100°F (37.7°C)
Water Pressure	20 psi (138 kPa)	100 psi (689 kPa)



ACCESSORIES

- **TrueZone®** ozone air purification device
- **True Platinum / Standard** water filter kits & replacement cartridges



**Performance specifications are subject to change. For the most up-to-date information, please visit [Energy Star's website](https://www.energystar.gov).

AL_Rev 07/2026_2