

701 S Ridge Avenue, Troy, OH 45374

1-888-4HOBART • www.hobartcorp.com

STANDARD FEATURES

- Red OFF, Green ON Buttons
- Compact Design
- Angled Front
- Planetary Drive
- Large Full Size Feed Hopper
- All Aluminum Hopper and Housing
- Double Interlock Switch
- Plate Speed 396 RPM
- Decoring Screw

OPTIONS

☐ Maximum Security Correctional Package

ACCESSORIES

- □ 3-Pack Plates 1/16, 5/32 slicer plates, 3/16 shredder plate, 1 wall rack
- ☐ 6-Pack Plates 1/16, 5/32, 3/8, 7/32 slicer plates, 3/16 shredder plate and 3/8 dicer plate, 2 wall racks
- □ 3-Peg Wall Rack designed to hold three plates for additional plate storage
- ☐ Slicer Plates: 1/16, 1/8, 5/32, 7/32, 3/8, 5/8*; 3/16 crimping plate
- ☐ Julienne Plates: 3/32, 3/16, 5/16
- ☐ Dicer Grids: 9/32, 3/8, 5/8*, 3/4*

*NOTE: The % LOW (15Dice-5/8L) Dicer or ¾ (15Dice-3/4) Dicer grid should be used with the % Slicer plate only.

- □ Shredder Plates: 1/16, 3/32, 1/8, 3/16, 5/16, 7/32
- ☐ Grater Plate: Fine
- ☐ French Fry: ¾

MODELS

☐ FP150 Continuous Feed Full Hopper Food Processor

Specifications, Details and Dimensions on Inside and Back.







FP150 FOOD PROCESSOR



SOLUTIONS/BENEFITS

Red OFF, Green ON Button

Ease of use

■ Operator can readily recognize

Compact Design

Ease of use, small footprint, reduced labor, increased sanitation and productivity

- Occupies minimal counter space
- Unit and receiving pan fit on 23" deep counter
- Plates remove in seconds
- Metal cover removes without tools for ease of cleaning
- Produces consistent quality product results in seconds
- Production capability for 750 lbs. per hour

Angled Front

Operator convenience, ease of use

- 50° angle for ease of product loading
- Helps to reduce operator fatigue

Planetary Drive

Performance, reliability

- Helps to prevent stalling under heavy loads
- No rest times required between loads

Large Full Size Feed Hopper

Flexibility, convenience, reduced labor

- Supports processing capabilities for large variety of products
- Design permits continuous cutting of long products
- Eliminates precutting

All Aluminum Hopper and Housing

Durability, sanitation

- Anodized finish resists harsh cleaners
- Easy clean up

Double Interlock Switch

Protection

■ Prevents machine from running when pusher plate swings away or is open

Plate Speed of 396 RPM

Product quality and consistency

■ Precise cutting and dicing action without bruising or mashing of products

Decoring Screw

Quality, consistency

Deflects products away from the plate hub for complete processing

3 PAK



1/16" Slicing Plate



3/16" Shredder Plate



5/32" Slicing Plate



Wall Rack

6 PAK 3 Pack Plus




7/32" Slicing Plate



3/8" Dicing Plate



%" HD Slicing Plate



(2) Wall Racks



SPECIFICATIONS

DESIGN: Compact, conveniently designed at 50° angle for operator convenience. Small base occupies minimal counter space. Carrying handle on back of housing designed for ease of moving unit. Housing constructed of anodized aluminum with rubber feet on base to prevent movement or skidding. Removable top cover is burnished aluminum. Cylindrical feed hopper, pusher and deflector plate of acetal thermoplastic.

ELECTRICAL: 120/60/1, 3 Conductor power cord (18 AWG) is 8 feet in length.

MOTOR: 4.8 amps. Planetary gear driven operating at 396 rpm output. ½ H.P. with overload protection.

SWITCHES: Easy to operate (red) OFF and (green) ON switch. Pusher plate and feed hopper interlocks.


STANDARD EQUIPMENT: Basic unit with deflector plate, decoring screw and cleaning brush.

WARRANTY: Unit has full one-year warranty on parts, labor and mileage against manufacturer's defects. Service contracts are available.

CUTTING TOOLS: Slicer, julienne and dicer plates feature cast aluminum plates with cutlery-grade stainless steel knives. Shredder and grater plates feature stainless steel cutting plates with acetal thermoplastic support hubs.

WEIGHT: Net - 39 lbs. Approximate Shipping - 46 lbs.


ASSEMBLY PARTS

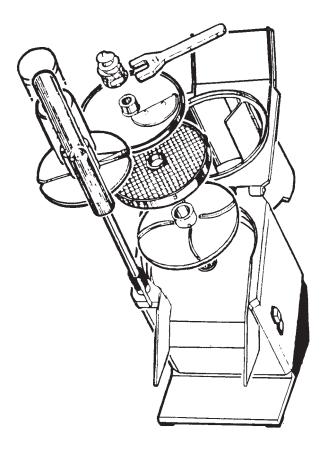


PRODUCT LOADING



Bulk Feeding



Tube Feeding for Long Products





Directional for Definitive Cuts



701 S Ridge Avenue, Troy, OH 45374 1-888-4HOBART • www.hobartcorp.com


DETAILS AND DIMENSIONS

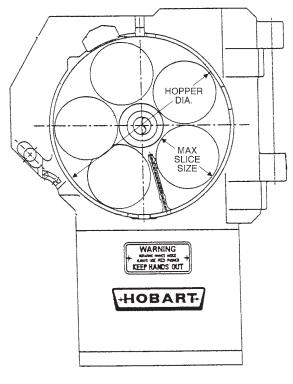

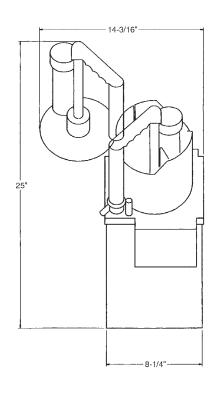

18-5/8" -3-3/16"- 20-1/4" 5-3/4" -11-5/8"

FP150 Hopper Diameter 63/8" Maximum Slice Size 21/2" Usable Depth 6" Feed Tube Diameter 21/8"

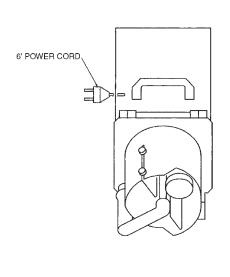

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.