



CLASSIC CONVECTION STEAMERS 15 PSI BOILER BASE STYLE

Project _____
Item _____
Quantity _____
FCSI Section _____
Approval _____
Date _____

Cleveland Classic Series CONVECTION STEAMERS

TWO COMPARTMENT, PRESSURELESS, PLUS ONE 6 GALLON KETTLE,
200, 300M BTU GAS FIRED STEAM GENERATOR
42" WIDE CABINET BASE DESIGN, with NICKELGUARD™

Cleveland Standard Features

- Cooking Capacity for up to six 12" x 20" x 2½" deep Cafeteria Pans.
- Pressureless cooking with forced convection steam, permitting doors to be opened while cooking continues.
- Solid State Controls operate water level and safety functions.
- Each compartment is equipped with a 60 minute mechanical timer, separate bypass switch for constant steaming and a cold water condenser for superior cooking results.
- **Instant Steam Standby Mode:** Holds generator at steaming temperature. Allows unit to start cooking instantly.
- **Durable 14 Gauge Stainless Steel Construction:** For Compartment Door and Steam Cooking Cavity.
- **Separate Main Power Switch for "On/Off"**
- **Exclusive Steam Cooking Distribution System:** The exclusive Convection Jets produce a high velocity convection steam without fans. Coved Corner design in cooking compartment distributes heat evenly and is easy to keep clean. Creased top & bottom enhance drainage. Cold Water Condenser for each compartment maintains a dry steam. Fully insulated cooking compartment for thermal efficiency. Removable Stainless Steel Slide Racks for easy cleaning.
- **Exclusive "Cool to the Touch" Compartment Door Design:** Free floating inner door with reversible door gasket provides an air tight seal. Stainless Steel Slam/Latch Door Latch mechanism provides greater reliability.
- **Left Hand Door Hinging:** Compartment Doors hinged left, controls on the right.
- Modular Cabinet Base with Hinged Door.
- **High Efficiency Gas Steam Generator** with Electronic Spark Ignition and Automatic Water Fill on start up.
- **Automatic Generator Drain at shutdown:** Large ¾" drain valve contains a "Water Jet" Spray Rinse Cleaning Cycle to keep drain clear.
- **Automatic Water Level Control System** with Low Water Power Cut-Off.
- Steam generator equipped with High Limit Pressure Safety Switch, 15 psi Safety Valve, and Steam Generator Pressure Gauge.
- **NSF Certified 6" Stainless Steel Legs** with adjustable flanged feet for a one inch level adjustment.
- Gas Pressure Regulator and Control Valve.
- Standard Voltage for Control: 115 volts, 60 Hz, single phase.
- Table Top includes 2" deep Drain Trough with ¾" Drain and Grate
- 6 gallon Tilting Kettle made of type 304 Stainless Steel, ¾" jacketed Kettle includes:
 - Trunnion mounted Steam Control Valve
 - 50 psi Kettle Steam Jacket Rating
 - Lift Off Cover
 - Double Pantry Faucet with Swing Spout
- **Secondary Low Water Cut-Off, factory installed (CALG)**
(Required for AZ. AR. CA. CO. CT. DE. FL. GA. HI. IL. IA. KS. MD. MA. MI. MN. MT. NE. NV. NM. NC. OK. OR. PR. RI. TN. UT. VA. WA. WV., Buffalo, NY, Wash. DC)

MODELS: ☐ 42-CKGM-200
☐ 42-CKGM-300



Shown with optional
Electronic Timer




Short Form Specifications

Shall be Two Compartments, CLEVELAND Convection Steamer, plus one 6 gallon Direct Steam, tilting, kettle, Model 42-CKGM-____, Gas-fired Steam Generator, NickelGuard, ____ M BTU. Solid State Controls operate timing, water level and safety functions. Steam Generator with Automatic Water Fill on start-up, Automatic Blowdown with additional Manual Drain Valve and Electronic Spark Ignition. For each cooking compartment: 60 minute Mechanical Timer, Manual Operation Mode and Cold Water Condenser. Type 304 Stainless Steel cooking compartment.

Options & Accessories

- ☐ Right Hand Door Hinging, Controls and Kettles on the Left (DHR)
- ☐ Electronic Timer with Compensating Load Feature (ETC)
- ☐ ON/OFF Steam Switch only for compartment controls (MC)
- ☐ Compartment Door Steam Shut Off Switch (SCS)
- ☐ Cafeteria pans in depths of 1", 2½", 4" and 6"
- ☐ Power Take Off Kit (GPTO), Kettle Interconnecting Kit (IMK)
- ☐ Correctional Packages
- ☐ Stainless Steel Base Frame (FSS)
- ☐ Stainless Steel Insulated Flue Cover (SSF)
- ☐ Quick Disconnect for gas line (QDC)
- ☐ Type 316 Stainless Steel Liner for high acid products (316-6G)
- ☐ Boiler Descaling Pump Kit (107142)
- ☐ Water Filters
- ☐ Rear Gas Connection (RGT)
- ☐ Compartment Door Steam Shut Off Switch

SECT. III PAGE 19
0609

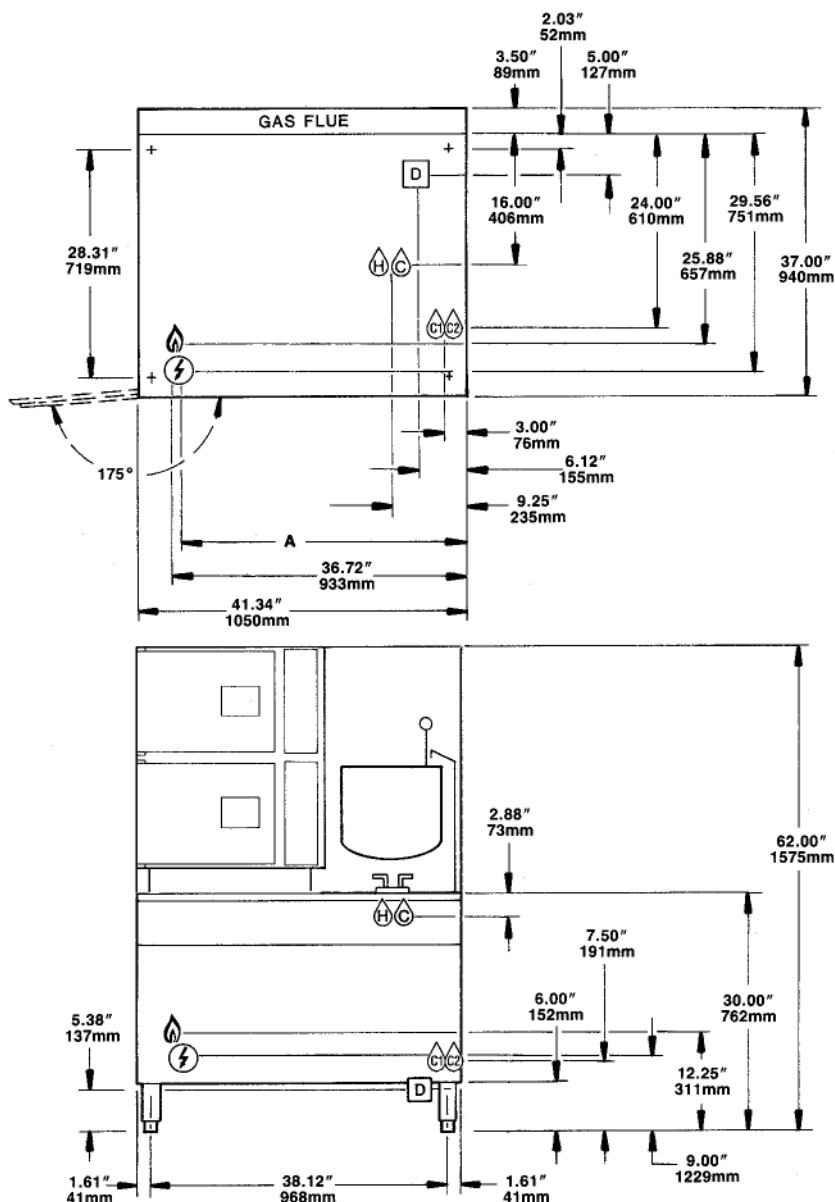

ACTUAL CAPACITIES:

Kettle 6 gallons/23 liters or 192, 4 oz. servings.

- Other size servings may be calculated.

Each compartment has capacity for:

- Three, 12" x 20" x 2½" or six, 12" x 20" x 1" deep Cafeteria Pans.

WATER QUALITY REQUIREMENT

The recommended minimum water quality standards whether untreated or pre-treated, based upon 10 hours of use per day, and a Daily Blowdown, are as follows:

TOTAL DISSOLVED

SOLIDS less than 60 parts per million

TOTAL ALKALINITY less than 20 parts per million

SILICA less than 13 parts per million

pH FACTOR greater than 7.5

CHLORINE less than 30 parts per million

Consult a local water treatment specialist for an on site water analysis for recommendations concerning steam generator feed water treatment (if required), in order to remove or reduce harmful concentrations of minerals. The use of highly mineralized water will mean that more frequent servicing of the steam generator will be necessary. The fact that a water supply is potable is not proof that it will be suitable for the generator.

NOTE: When ordering optional reverse door openings: Control Panels, door openings, cooking compartments, clearances, and kettle are opposite that shown.

	BTU RATING	INCHES	mm
A	200	35.56	903
	300	30.94	786

GAS 🔥		ELECTRIC ⚡	WATER 💧 & 🚰	DRAINAGE 🚰	CLEARANCE
NATURAL	PROPANE	25 watts per compartment 50 watt Steam Generator Control 5.0 Amps ** Do not connect to GFI outlet. See note below.	¼" NPT Cold Water Inlet 35 psi minimum 60 psi maximum ¼" NPT hot and cold water for Swing Spout Condenser feed Boiler feed	The Floor Drain must be located outside the confines of the equipment base. 1 1/2" IPS common drain. Do not connect other units to this drain. Do not use PVC pipe for drain.	Right - 6", Left - 6", Rear - 6" (12" on control side if adjoining wall or equipment is over 30" high for service access) For use in non-combustible locations. Contact factory for variances to clearances
¾" IPS for 220,000 BTU or less. 1.00" IPS for 250,000 BTU or more. Supply Pressure: 4.00" W.C. minimum 14.00" W.C. maximum	¾" IPS for 220,000 BTU or less. 1.00" IPS for 250,000 BTU or more. Supply Pressure: 12.00" W.C. minimum 14.00" W.C. maximum				
Manufacturer must be notified if unit will be used above 2,000 ft. altitude.					

NOTES:

**DO NOT CONNECT TO GFI OUTLET. CLEVELAND RANGE RECOMMENDS GAS FIRED 120 VOLT STEAMERS BE HARD WIRED DIRECTLY TO ELECTRICAL SYSTEM.

Cleveland Range reserves right of design improvement or modification, as warranted.

Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.

Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are ASME/N. Bd, NSF and CSA (AGA, CGA).

(NOT TO SCALE)

SECT. III PAGE 20

6069

Litho in U.S.A